



Tooling for punch presses MULTIMATRIX

MULTIMATRIX CATALOG
MATRIX

INDEX

	BASIC CONCEPTS
5	• PUNCHES
5	• STRIPPERS
5	• DIES
5	• SPECIAL TOOLING
6	• MATERIAL HARDNESS
6	• MATERIAL THICKNESS IN RELATION TO HOLE DIAMETER
6	• ROUNDING OFF AND SMOOTHING
6	• THE MACHINE OPERATOR
7	CLEARANCE CALCULATION AND CONTROL (EXCESSIVE OR INSUFFICIENT CLEARANCE RESULT)
8	PUNCHING STRAIN AND RELATED CALCULATIONS - SHEAR SHARPENING
9	SURFACE COATINGS - USE AND BENEFITS
9	PROCESSING ON DEMAND
10	SHAPES CODING
12	MULTIMATRIX: PROGRAMMING AND USE SUGGESTION
14	MULTIMATRIX: ROTATION SYSTEMS
15	MULTIMATRIX WITH FIXED HEAD
16	MULTIMATRIX WITH ROTATING HEAD
18	MULTIMATRIX 4/B RHP
20	MULTIMATRIX 4/B
22	MULTIMATRIX 6/24 R MMX
23	MULTIMATRIX 6/24 F MMX
26	MULTIMATRIX 6/24-6 ERHP
28	MULTIMATRIX 10/18 R MMX
29	MULTIMATRIX 10/18 F MMX
32	MULTIMATRIX 2/A-2/B
33	MULTIMATRIX 6/A
36	MULTIMT Series 24
37	MULTIMT Series 16
38	MULTIMT Series 8
39	MULTIMT Series XB
40	MULTIMT Series 6/24-6
41	MULTIMT Series 6/24-6 AR
42	MULTIMT Series X12,7
43	THICK TURRET B Station - Lubricated
44	THICK TURRET A Station - Lubricated
45	MULTIW Series 3B
46	MULTIW Series 8/16
47	MULTIW Series 8/16 N
48	MULTIW Series 20/8 N
50	SHEAR GRINDING FIXTURE
51	ALIGNMENT TOOLS
52	TOOL HOLDER CART
53	FITTINGS
54	MULTITOOL-TOOLS LINK TABLE
59	TOOLS CODING
60	COMPANY PROFILE



BASIC CONCEPTS

For over 20 years **MATRIX** has been manufacturing tooling for working metal sheet, availing of highly qualified technicians who constantly update their knowledge about the different needs of the production cycle.

MATRIX also invests in best technologies: from sophisticate software for projecting to the computerization of productions data, from planning to the final tests of the products.

All this allows our company to reach a high qualitative standard, certified by the system **ISO 9001:2008** and to obtain fast delivery times even for special tooling supplies.

PUNCHES

Punches are manufactured in accordance with the most modern processes, as well as using a single type of steel (M2), and with their high vacuum thermal treatment they guarantee the best performances on all types of material; this performance could be further improved by the most modern surface coatings of TiAlN micro layer. Matrix ensures the maximum care in dimensional and axial concentric accuracy, as well as in the roughness of the cutting part to guarantee its longer life.

STRIPPERS

These tools are manufactured with steels that are resistant to both wear and the greatest stresses, and are produced with the strictest tolerances to guarantee long life to the punches and punch press turrets; all guides are hardened to 60 HR_c and, where possible, are provided with large lubrication channels.

DIES

Full automatic production cycles guarantee the quality standard of our dies which are manufactured with certified steel (D2), as well as having high vacuum treatment.

All possible technologies are employed to discharge cyclical tensions, as well as to avoid scraps reclimbing through the use of proper manufacturing geometry. Dies, which are tested with computerized systems and with hourly frequency, guarantee a very high reliability level.

SPECIAL TOOLING

Considering the continuous requests of special tooling, **MATRIX** takes particular care of such a sector.

Our technical department, in short time, is able to give solutions, quotations and delivery times which are getting more and more close to the standard tooling ones.

Each special tool is coded in order to allow us an easy and quick tracking down during all its working phases, from design to testing.

BASIC CONCEPTS

MATERIAL HARDNESS

Punching is usually carried out on mild or low alloy steel. On material with a higher resistance there are difficulties, and the processing requires special punches which however sustain a greater wear.

In any case, the maximum load necessary to execute punching must be definitely lower than the punch maximum resistance to compression (*see tonnage calculation formula on page 8*).

The maximum compression load that the punch can tolerate depends on the type of steel and its hardness. For instance, an hardened steel for tools resistant to collisions can tolerate a compression load of 2000 N/mm² before reaching the breaking point, and can be used with specific working pressure up to 1500 N/mm², therefore providing good results to the life of the tool. When you place an order for a punching tool, it is recommended to specify the type of material and thickness that must be punched.

MATERIAL THICKNESS IN RELATION TO HOLE DIAMETER

Material thickness also plays its part both alone and in relation to the punching diameter. This is particularly valid when the diameter of punched holes is close to the metal sheet thickness value.

A traditional rule says that the diameter of the punch must never be lower than the metal sheet thickness. Nevertheless, with the advent of the hydraulic punching machine, it has become possible to adjust the impact speed between the punch and metal sheet more easily and so partially overcome that rule.

In various cases, although with very great stresses, holes are punched on materials with a thickness higher than the hole diameter.

However, in these conditions there are great stresses and consequently higher wear and the tool life is proportionally lower.

The same great stresses that occur in this case require precautionary measures as well as respect for accident prevention norms, for instance the use of blockages and protections.

On the following pages there are some simple mathematical formulas to calculate the strength.

ROUNDING OFF AND SMOOTHING

The life of a stamp could be considerably influenced by the shape of the hole to be punched. The geometry that involves sharp corners is less favourable by nature. Wherever possible, it is necessary to smooth or round off these sharp corners. In the cases of square or rectangular holes, providing a 0,3÷0,5 mm minimum round off greatly helps the life of the tool.

THE MACHINE OPERATOR, THE MOST IMPORTANT FACTOR

Even with all of the constructive devices on the front of the tools and machines, the machine operator probably remains the most important factor in considering the life of the stamp. In fact, he directly controls various factors not noticeable in other ways.

The correct use of a punching machine is a task which requires experience: first of all, the machine operator must be familiar with the machine, and be informed on the previous points and related operations.

Punching operations are developed, as seen, with extremely high specific pressures and stresses, so that the safety of the machine and the operator must be appropriately considered in respect to regulations in force, but also without forgetting to use the measures that are requested by particular environmental conditions not foreseen by legislation.

CLEARANCE CALCULATION AND CONTROL

The clearance value between punch and die affects not only the life of these two components, but also the surface evenness of the sheared piece. In practice, clearance is fixed in accordance with the material thickness as well as its nature.

A correct clearance produces (on a mild steel sheet) holes in which the upper third of the height is cylindrical and properly sheared, while the lower two thirds are lightly conical and show tear signs.

An inadequate clearance produces instead a secondary shearing effect which means additional wear on the punch.

As previously said, the lack of lubrication contributes to a progressive spontaneous increase of the punch diameter and therefore to a likewise progressive and spontaneous clearance reduction.

However, an excessive clearance produces holes with intermediate tear zone and, as a whole, a great loss of evenness on the surface.

Quoted below is a table for die clearance percentage calculations with regards the thickness and common types of material to be worked.

It is a table based on our own and our customers' experiences, in order to obtain the best quality on finished pieces and less wear on tools.

DIE CLEARANCE RELATED TO MATERIAL THICKNESS

Material	Thickness Range	Minimum or Blanking*	Standard	Maximum
Aluminium Copper Brass 20÷25% Kg/mm ²	Up to mm 2	8%	10%	12%
	From mm 2 to mm 4	10%	12%	15%
	Over mm 4	12%	15%	20%
Mild Steel 30÷40% Kg/mm ²	Up to mm 2,5	15%	18%	20%
	From mm 2,5 to mm 5	18%	22%	25%
	Over mm 5	20%	25%	30%
Stainless Steel 60÷80% Kg/mm ²	Up to mm 1,5	15%	20%	22%
	From mm 1,5 to mm 3	18%	22%	25%
	Over mm 3	20%	25%	28%

* Blanking: when the scrap is the requested part.

PUNCHING STRAIN AND RELATED CALCULATIONS

TONNAGE GENERAL FORMULA				Material	Material K
$\frac{P \times S \times K}{28,3}$				Aluminium	0,6
				0,6	0,6
				0,6	0,6
				1	1
				Stainless Steel	1,5
EXAMPLE:	$\frac{40 \text{ (perimeter of a square with mm 10 side)} \times 2 \text{ (material thickness in mm)} \times 1,5 \text{ (Stainless Steel K)}}{28,3}$				= 4,24 (tonnage)


SHEAR SHARPENING USE AND BENEFITS

With whisper sharpening we mean the various geometry of the punch upper face that are made only upon request. Sharpening benefits are:

- Tonnage reduction
- Scrap reclimbing reduction
- Ease of extraction
- Noise reduction
- Vibrations and counterblow reduction on all components of the machine.


DWP

Double positive whisper:
for high thickness and
balanced load.

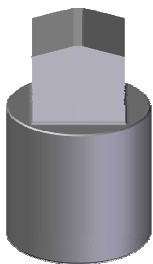


WNT

Concave negative whisper:
for thin thickness and small
punch shape nibbling.

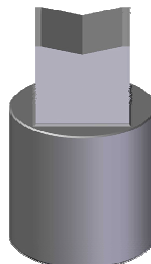

WN

Negative whisper:
for high thickness and stiff
and fast machines (the
inclined sharpening
tends to shift the
sheet).

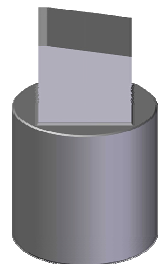

Quoted below is an illustrative table showing tonnage reduction where we consider standard depth DWP sharpening.

Material Thickness in mm	1	1,5	2	2,5	3	4	5	6
% Tonnage reduction	60	50	40	35	25	20	15	10

SURFACE COATINGS

USE AND BENEFITS

In order to improve working characteristics, the surface of all punches can be coated.

The coating thickness, from 0,002 mm to 0,005 mm, adheres to punch surface by a multilayer PVD (Physical Vapour Deposition) processing and gives the surface a considerably greater hardness, and also a lubricating ability. It is a really effective barrier between tool and metal sheet.

MATRIX uses two types of coating, Type A (Titanium Nitride) and Type B (Titanium-Aluminium Nitride).

Type A coating yellow-gold coloured, provides to the punch a higher surface hardness up to four times the initial one and an optimal self-lubrication capability with a friction coefficient equal to 0,44.

It's recommended for extreme working processes,

without lubrication or with difficulty extractable doughy materials, such as copper or aluminium alloys.

Type B coating grey-blue coloured, is an evolution of the previous one which, besides imparting a higher hardness on tool surface, is more solid and its endurance increase; this coating resists to higher temperature, little lower than 900°.

Thanks to these characteristics, it's recommended in case of high speed punching machines (500÷1000 strokes per minute) and it's also excellent for STAINLESS STEEL processing.

Coatings are on customer demand only, and are priced separately.

PROCESSING ON DEMAND

Radius on corners of the punches

Radius on square and rectangular corners of the punches (specify radius) increases the life of the punch and drastically reduces dies breaking near corners.

Whisper

Whisper punches: variable price increase (request quotation) depending on whisper type (see previous page) and punch dimensions.

Large punch rake (SPM)

It is recommended on material thicknesses over mm 4, where it helps punch reclimbing or punch extraction from metal sheet.

Coatings

Anti-wear coating available. We recommend coatings on nibbling or punching processing on seizing materials like Stainless Steel or alloys, or on any material high thicknesses.

Stiffened dies



















On high material thicknesses or critical shapes we suggest stiffened dies which are suited to stand high compression.

Our Technical Office is at your disposal for any possible explanations, advice on better usage, feasibility and cheapness of special processing and their applications.

SHAPES CODING


A0A	A0B	A0C	A0D	A01	A02
A03	A04	A05	A06	B01	B02
B03	B04	B05	B06	C01	C02
C03	C04	C05	C06	C07	C08
C09	C10	C11	C12	C13	C14
C15	C16	D01	D02	D03	D04
D05	D06	E01	E02	E03	E04

SHAPES CODING

					
E05	E06	F01	F02	G01	H01
					
H02	H03	H04	H05	H06	H07
					
H08	H09	H10	H11	H12	H13


ANGLE SETTINGS

The diagram that follows is illustrative of angle settings

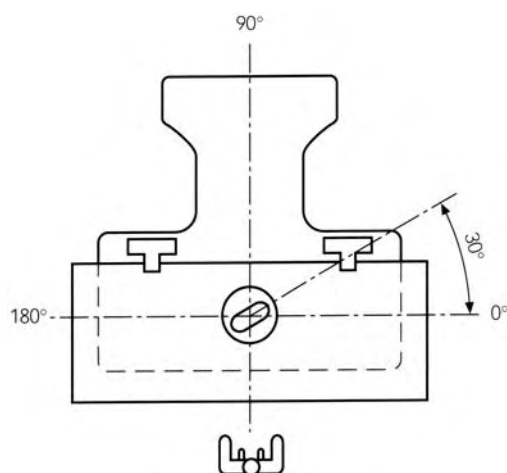

Top view of punch press

Attention: in case of order please specify the position of the references placed on the die housing of the machine (not only the shape orientation respect the die).

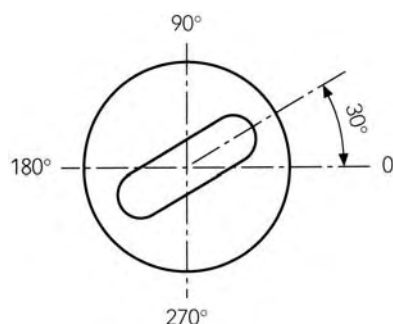

30° shape example

PROGRAMMING AND USE SUGGESTIONS

The choice how to punch, to nibble, to feed and to round off during programming, is free.

Nevertheless, a logical and accurate choice will avoid problems and reduce the working time. The operator's experience will be a great help, but at the beginning we suggest to ask for information and help to the machine manufacturer.

Some good rules:

- I. Do not ever leave any metal scraps on the punching machine working surface (nibbling or round off residuals); they could lay on the cutting area causing a double thickness.
- II. The easiest way to nibble is with round punches, but being limitative, square or rectangular punches are often used; in this case flat cut is recommended, while if the punch has a special sharpening, feeding is compulsory (see fig. A). For nibbling, do not use round punches with special sharpening. However a correct nibbling is programmed with step equal to 75% of the punch measure (for instance: square 10, step 7,5; rectangular 4x20, step 15). Like this, the punch will always work balanced.

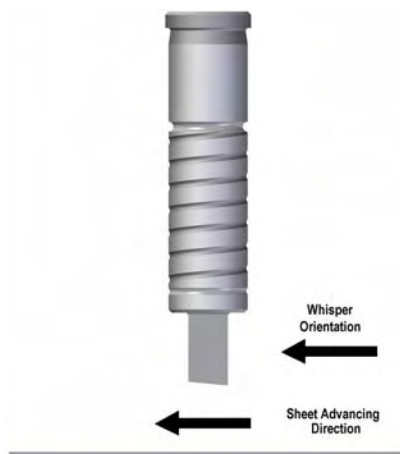


Figure A

- III. Another problem which might occur when nibbling, is actually connected to the programming; in fact when setting up a nibbling length, by feeding according to point II, the last sheared part might happen to be lower than 75% of tool dimension (see fig. B).

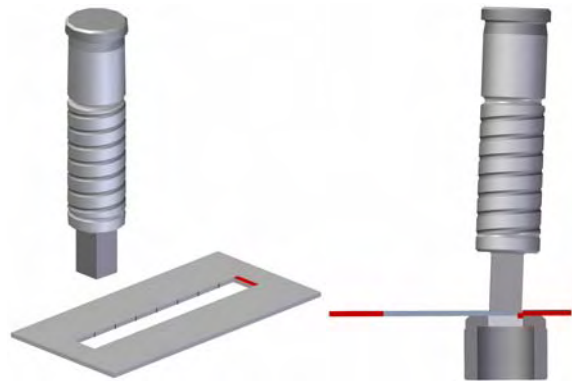


Figure B

On such a situation, due to the side load, the tool tends to lean over the sheet, causing the following:

- a) collision of the punch opposite cutting part with the die, in case the clearance is proper for thin thicknesses;
- b) clearance increase on the shearing area which will cause sheet deformation, excessive burrs and tool wearing.

The same problem occurs when we want to shear a sheet edge, like shown on Figure C.

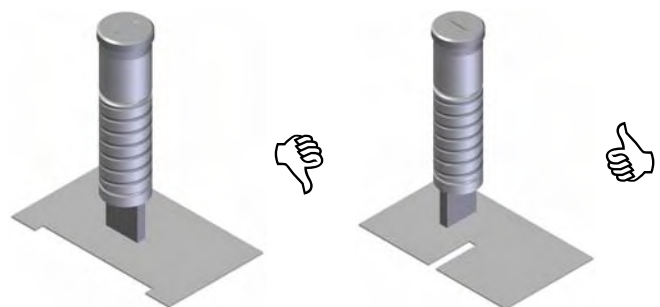


Figure C

PROGRAMMING AND USE SUGGESTIONS

To avoid the above mentioned problem it is recommended to reverse the last two strokes of the nibbling sequence (see Fig. D). In this second case the punch will perform a shearing with the 100 % of the cutting area as second-last stroke (end- nibbling); afterwards it will be positioned exactly above the centre of the material section which has to be eliminated.

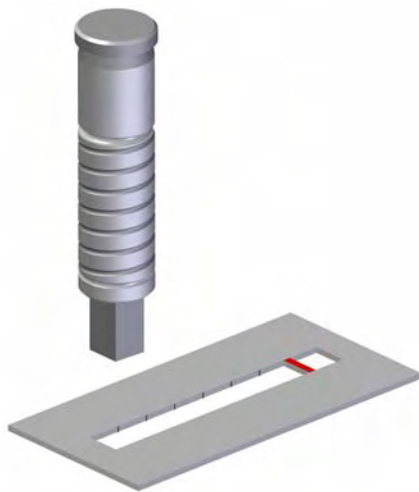


Figure D

- IV. If the processing requires to perform cluster holes, that means processes which might deform the sheet, it is recommended to make at first a pre-pierce with dimension equal to 40% of the final hole, while the final hole itself will be performed later on. This expedient considerably reduces the efforts necessary to obtain the desired result, minimizing the sheet deformations.
- V. In order to have a correct punch extraction, when the material thickness increases, please reduce the punching machine speed. This because the metal sheet dragging axle could move before the complete extraction, shutting the machine down in alarm.

Anyhow, keep in mind that shearing and nibbling processes performed by using a multitool, need some tricks required by the machine/multitool structure and according to the forces generated during working phases.

A multitool advantage is to have several tools inside the same guide assembly, selected by rotating the machine ram; but there's also a disadvantage since the force applied to the active punch, acts lengthwise the axle which does not coincide to the multitool one, so this causes a multitool and consequently a punch inclination, although minimum.

This situation amplifies once thickness and diameter increase, that is when the force (see arrow 1, Fig. E) is enough to cause machine structure bending (see arrow 2, Fig. E) worsening therefore the problem.

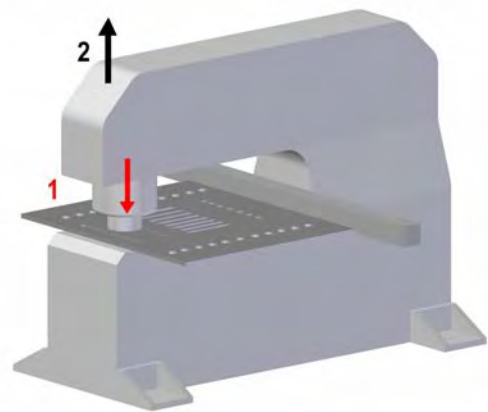


Figure E

LUBRICATION: a must

It is the first rule to apply; being punching a shearing and extrusion processing, the shearing area lubrication is a must for a good result.

Lubrication has an essential role in punching machines and particularly in punching stamps.

PROGRAMMING AND USE SUGGESTIONS

When the punch shears the sheet, small quantities of material get stuck to the punch surface.

Passing from one punching cycle to another, the material deposits layer after layer, causing a progressive increase of the punch diameter, although only hundredths of a millimetre.

This phenomenon triggers a recurrent cycle: the punch diameter, by widening, reduces the clearance and accentuates the material friction, letting the problem to get worse and worse.

A lubricant oil with proper characteristics acts as a barrier between punch and material, reducing significantly both friction and material accumulation on the punch surface, improving therefore the punch life.

Generally, with a greater viscosity there's a better protection against such a phenomenon. High viscosity is useful during punch retraction.

If for some reasons lubrication is a problem, Titanium coated punches could help (please consult our Technical Department)

Daily multitool lubrication is obligatory.

The inobservance of this rule will cause an excessive Multitool wearing.

CONCLUSIONS

Being the Multitool a precision device, we recommend its use only to trained personnel.

After several hits or however once a year for 8 hours shifts per day, the Multitool needs ordinary maintenance carried out by the manufacturer or qualified personnel.

Periodic replacement of extraction springs sets inside the multitool, might be necessary in case of high thicknesses

Before proceeding with any action on the multitool, in case of doubts please contact the manufacturer

MULTIMATRIX: ROTATION SYSTEMS

TYPE OF MULTIMATRIX

Matrix manufactures 2 types of multitool which differentiate by the head characteristics.


We can supply either tools with rotating head on series R and RHP, or fixed head on Series F.

The above mentioned differentiation, basically indicates the way of active tool selection between the ones available on the multitool.

TOOL ROTATION (INDEXING)

Rotation of single tool is possible with both types of multitool and gets performed by the multitool rotation itself.


This can be performed by means of a punching rotating station, only on machines provided with this characteristic. The advantage is considerable since you can use one single tool by rotating it through 360° without having to use several punches.

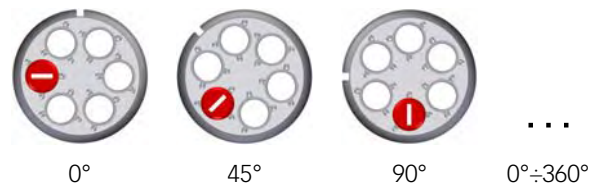

MULTIMATRIX WITH FIXED HEAD

TOOL SELECTION


In order to use a multimatrix with fixed head it's necessary the punching machine to be equipped with ram (A) conformed to hit one tool at the time besides the centre head (B) of the multimatrix. The ram, by rotating, selects the required tool.

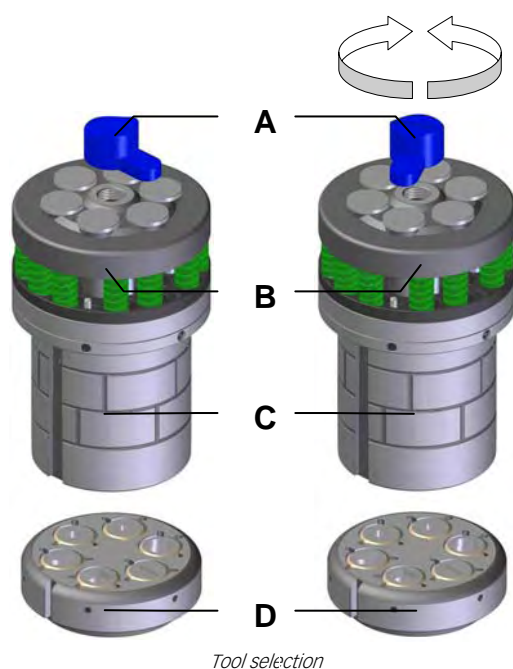

Tool selection

TOOL ROTATION (INDEXING)

Tool indexing is also possible when we use a punching machine with rotating station. In order to avoid any modification of the active tool selection on a multitool with fixed head, rotation of ram (A) must equivalently accompany the multitool overall rotation (parts B, C and D).

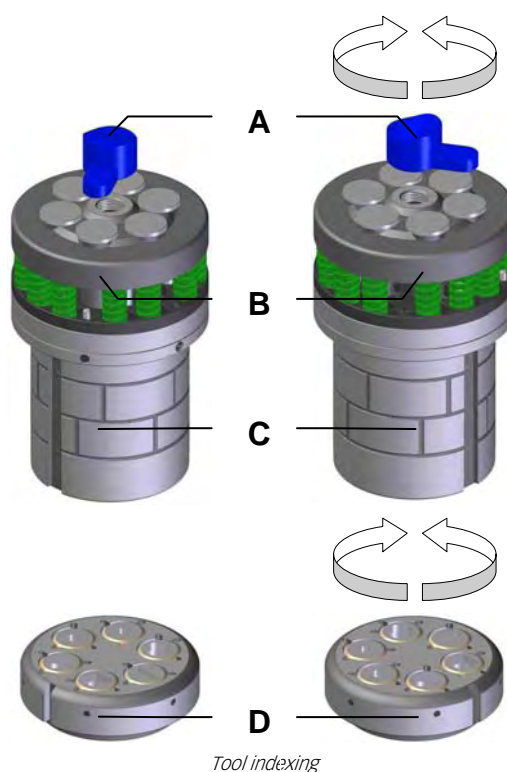

Tool indexing

MULTIMATRIX WITH ROTATING HEAD


TOOL SELECTION

On multitool with rotating head the ram (A) can be a normal piston with the only vertical movement, having no particular shape.

In this case, the selection of required tool refers to some other devices placed inside the head (B)

Selection occurs by rotating the multitool head (B) compared to its body (C) and this movement can be performed by means of gear, pulley system or cam.


Alternatively, on machines with rotating station, we can take advantage of this last characteristic.

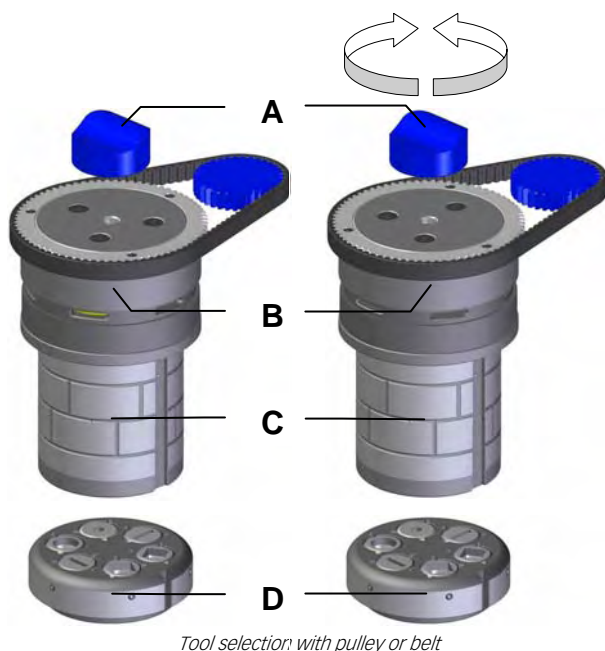

In this case we can fit a simple system to keep the multitool head (B) fixed (for instance by fitting a pneumatic little piston (E) on proper grooves placed on the upper part) while the lower parts (C) and (D) turn thanks to the station movement itself.

To manufacture a punching machine with this second system is more inexpensive since just by rotating the station, either the tool selection or its indexing get carried out.


In order to adapt to specific client's needs, all multitool with rotating head can be supplied with customized head upper part (B)

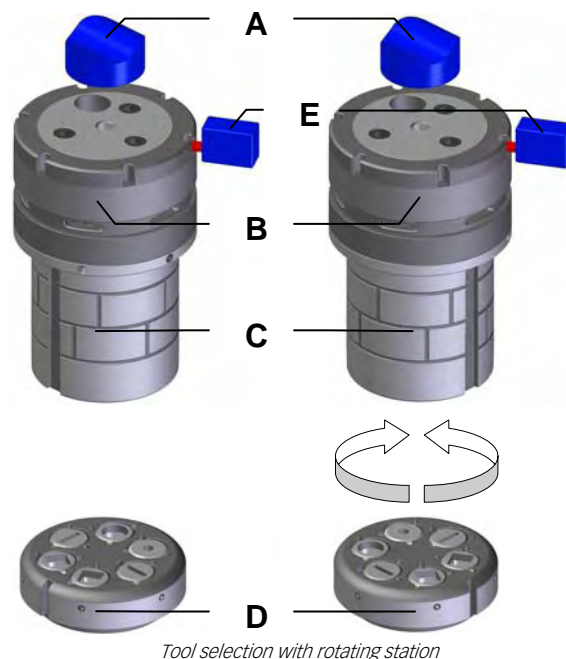

TOOL ROTATION (INDEXING)

Tool indexing is also possible when we use a punching machine with rotating station.

On a multitool with rotating head, its overall rotation (parts B, C and D) is sufficient to complete the operation since the selection of active tool doesn't get modified.

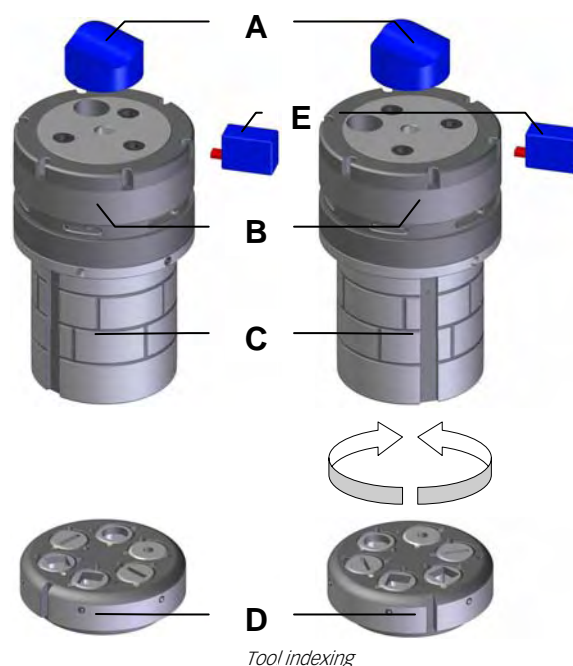

MULTIMATRIX: MULTITOOL AND TOOLING



MULTIMATRIX 4/B RHP


MULTIMATRIX ROTATING SERIES

PATENTED

4 x MAX



= mm 31,7

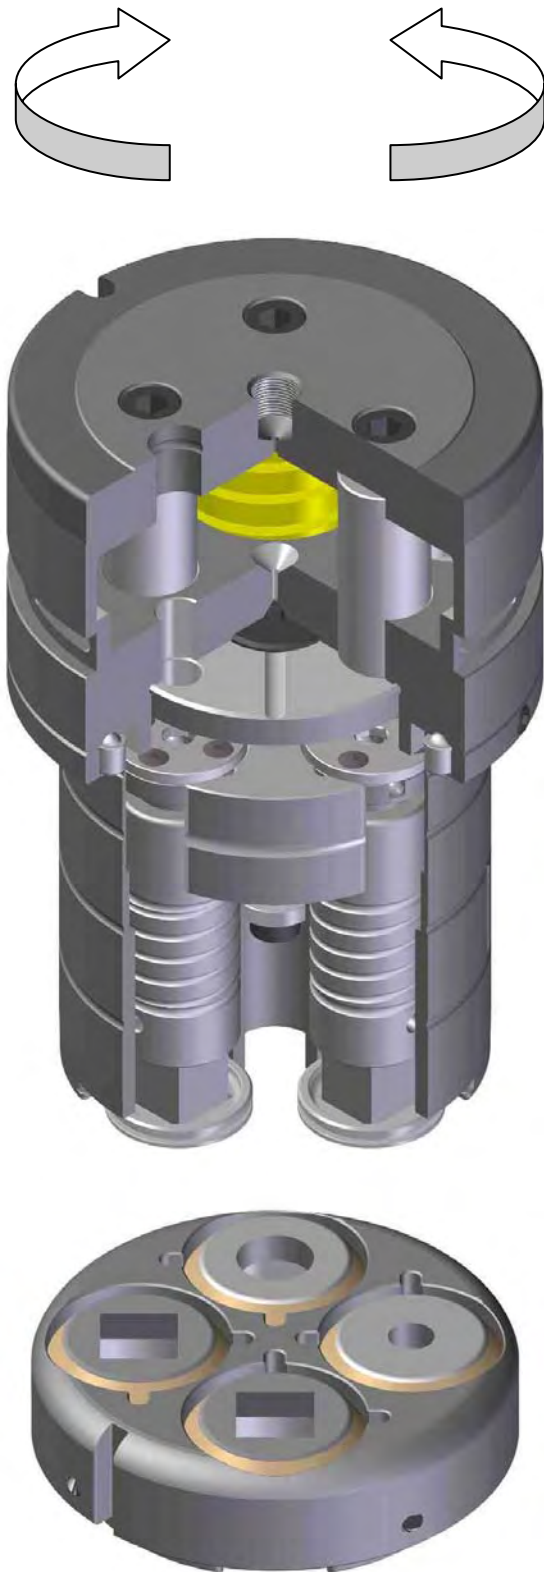

REFERENCE CODES


Basic Set: FAEVDY00

Starting Set: FAEVGS00


TECHNICAL SPECIFICATIONS

- 4 stations for Thick Turret B Station standard punches (maximum diagonal mm 31,7 - height mm 100,5)
- Maximum thickness on standard working:
 - 4 mm on stainless steel
 - 6 mm on mild steel
- Quick strippers and punches change, without Multitool opening
- Dies holder with 2 positioning references, for each station
- Compression and extraction aligned with selected punch, for a high rigidity, comparable to a mono tool one
- Total lubrication: inner and outer, manual or automatic
- Customizable upper part according to specific requirements, for several machine models
- Fitting on a regular Thick Turret D Station
- For punching machines with rotating station (index)

UPPER ASSEMBLY VIEW

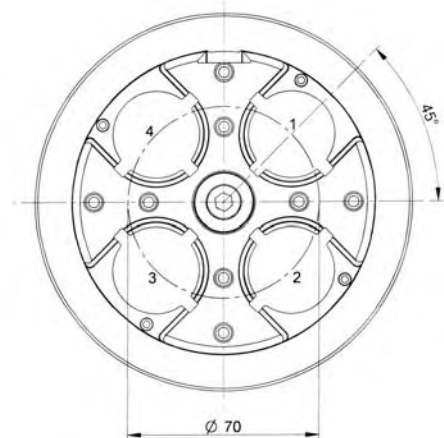


LOWER ASSEMBLY VIEW

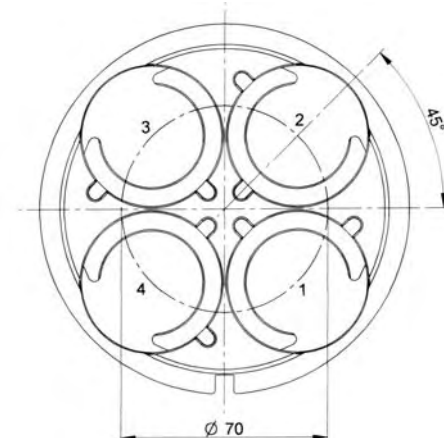

THICK TURRET

B STATION - LUBRICATED

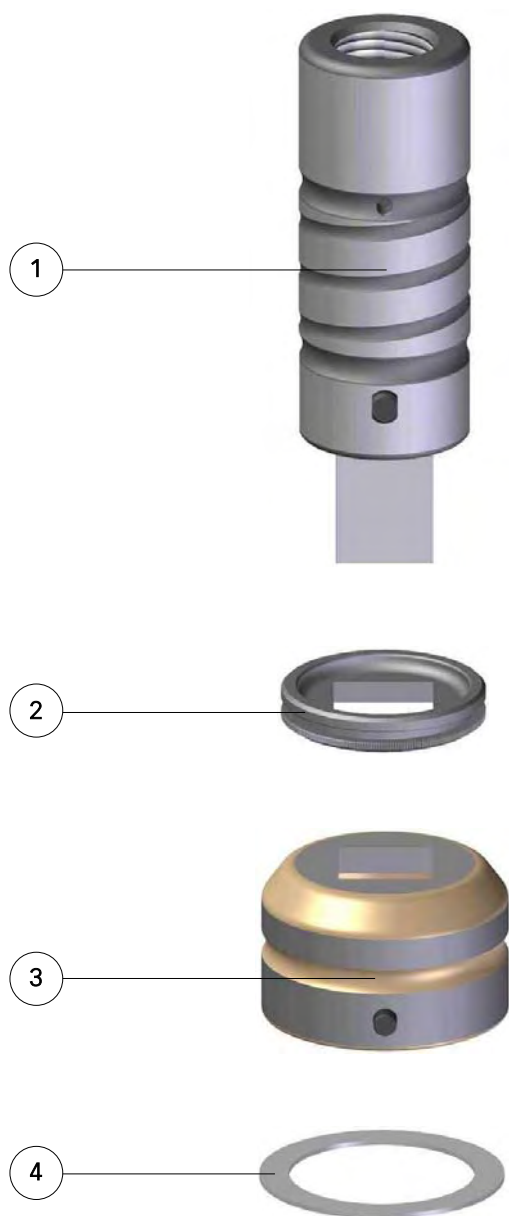MAX $\varnothing \nabla$ = mm 31,7

POS.	CODE DESCRIPTION	PRICE
ROUND TOOLS		
1	F219ZZ00.YYY Round Punch - Lubricated	
2	F2224W00.YYY Round Stripper	
3	F2222W00.YYY Round Die	
SHAPED TOOLS		
1	F219ZZXX.YYY Shaped Punch (Standard Shapes ¹) - Lubricated	
2	F2224WXX.YYY Shaped Stripper (Standard Shapes ¹)	
3	F2232WXX.YYY Shaped Die (Standard Shapes ¹)	
FITTINGS AND OPTIONS		
4	F2187400 9 x Die Shims Kit	
	WN Whisper Sharpening on Punch	
	DWP Whisper Sharpening on Punch	
	WNT Whisper Sharpening on Punch	
	DWNT Whisper Sharpening on Punch	
	Type A or Type B Coating on Standard Punch (5 extra working days required)	
	Dies with Rotated Shape	
	Stengthened Shaped Die	
	Shaped Dies with 3 References: 0°-90°-225°	
	Punches with Rotated Shapes	
	Dies with small dimensions shapes (under mm 1,70 including clearance)	
	Punches with small dimensions shapes (over or equal to mm 1,5 and under mm 4,00)	
	Punches with small dimensions shapes (under mm 1,5)	
	Anti Slug available on dies with clearance equal to mm 0,13 and over	
	Dies with Anti Slug SC	
TECHNICAL CHARACTERISTICS		
Punch max. diameter/diagonal		mm 31,7
Punch height (new)		mm 100,5
Shear Sharpening on demand		
Die height (new)		mm 30,4
Min. die height (sharpened)		mm 27,9
COMPATIBLE MULTITOOL		
MATRIX: MultiMATRIX 4B RHP		
MATE PRECISION TOOLING: MTE4 Ultra MT 3 Ultra IMT 3		
NOTE ¹ Standard Shapes are all those indicated at page 10 beginning with character A		

© 2011




MATRIX s.r.l. Via Ponte d'Oro - 36015 SCHIO (VI) Italy
 Tel. +39 0445 671015 - Fax +39 0445 671035
 www.matrixtools.eu - info@matrixtools.eu

MULTIMATRIX 4/B

MULTIMATRIX STANDARD SERIES

4 x MAX \varnothing \square = mm 31,7

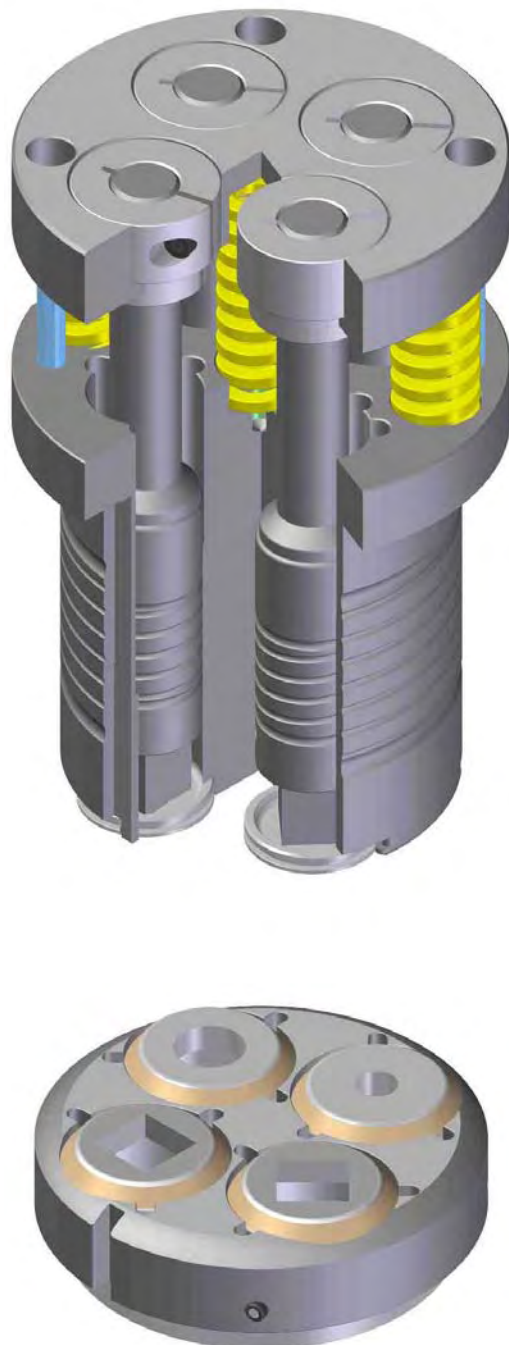

REFERENCE CODES


Basic Set: F615DY00

Starting Set: F615GS00


TECHNICAL SPECIFICATIONS

- 4 stations for Thick Turret B Station standard punches (maximum diagonal mm 31,7 - height mm 207)
- Maximum thickness on standard working:
 - 4 mm on stainless steel
 - 6 mm on mild steel
- Quick strippers and punches change, without Multitool opening
- Dies holder with 3 positioning references, for each station
- External springs for easy replacement when maintaining
- Fitting on a regular Thick Turret D Station
- For punching machines with fixed station and rotating ram

UPPER ASSEMBLY VIEW

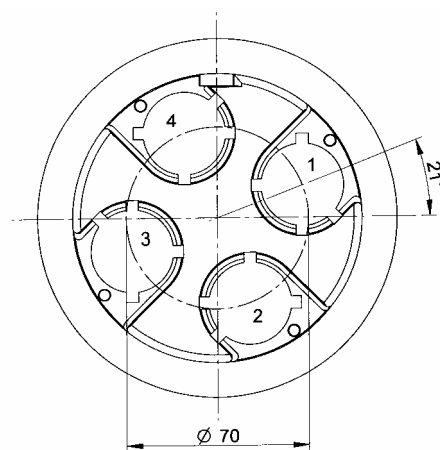


LOWER ASSEMBLY VIEW

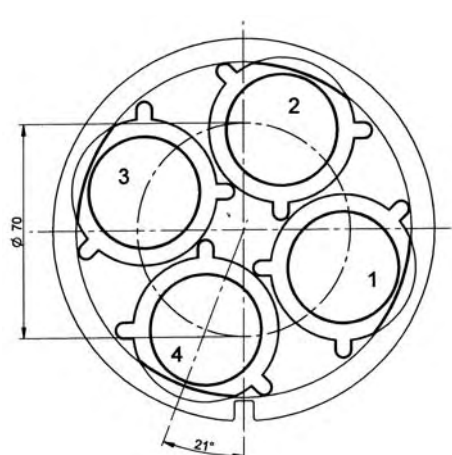

THICK TURRET

B STATION - STANDARD

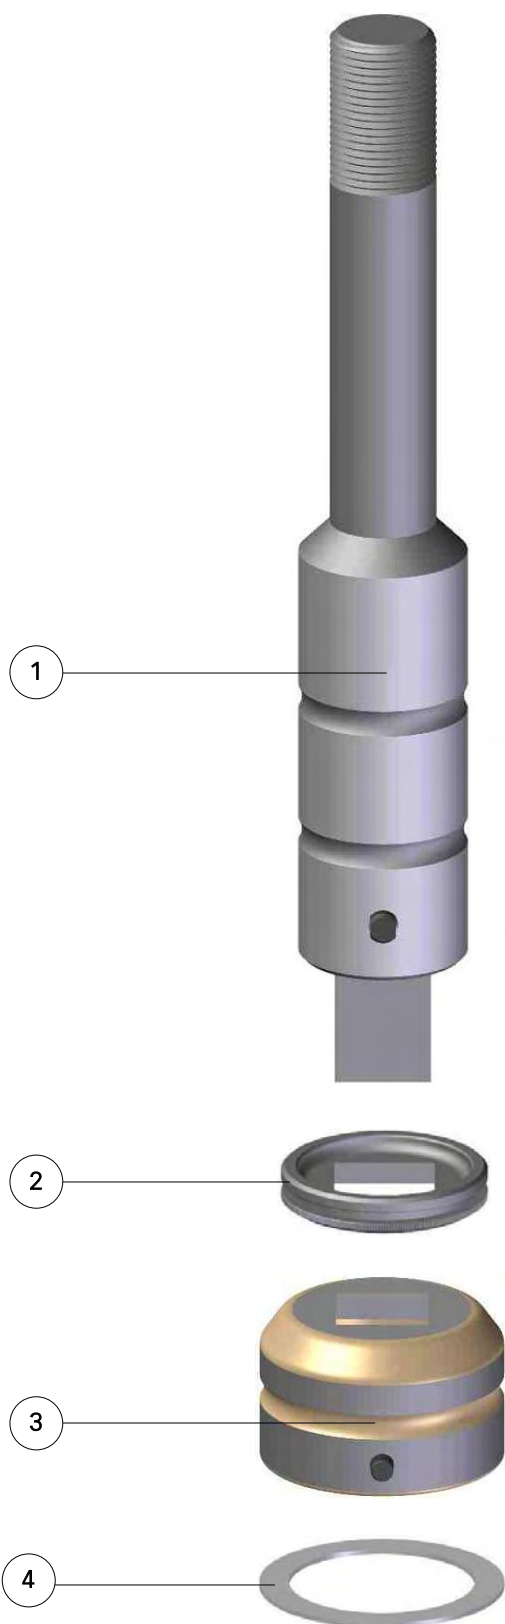MAX $\varnothing \nabla$ = mm 31,7

POS.	CODE DESCRIPTION	PRICE
ROUND TOOLS		
1	F221ZZ00.YYY Round Punch	
2	F2224W00.YYY Round Stripper	
3	F2222W00.YYY Round Die	
SHAPED TOOLS		
1	F221ZZXX.YYY Shaped Punch (Standard Shapes')	
2	F2224WXX.YYY Shaped Stripper (Standard Shapes')	
3	F2232WXX.YYY Shaped Die (Standard Shapes')	
SETTINGS AND OPTIONS		
4	F2187400 9 x Die Shims Kit	
	WN Shear Sharpening on Punch	
	DWP Shear Sharpening on Punch	
	WNT Shear Sharpening on Punch	
	DWNT Shear Sharpening on Punch	
	Type A or Type B Coating on Standard Punch (5 extra working days required)	
	Dies with Rotated Shape	
	Stengthened Shaped Die	
	Shaped Dies with 3 References: 0°-90°-225°	
	Punches with Rotated Shapes	
	Dies with small dimensions shapes (under mm 1,70 including clearance)	
	Punches with small dimensions shapes (over or equal to mm 1,5 and under mm 4,00)	
	Punches with small dimensions shapes (under mm 1,5)	
	Anti Slug available on dies with clearance equal to mm 0,13 and over	
	Dies with Anti Slug SC	
TECHNICAL CHARACTERISTICS		
Punch max. diameter/diagonal		mm 31,7
Punch height (new)		mm 207
Shear Sharpening on demand		
Die height (new)		mm 30,4
Die min. height (sharpened)		mm 27,9
COMPATIBLE MULTITOOL		
MATRIX: MultiMATRIX 4B		
NOTE Standard Shapes are all those indicated at page 10 beginning with character A		

© 2011



MATRIX s.r.l. Via Ponte d'Oro - 36015 SCHIO (VI) Italy
Tel. +39 0445 671015 - Fax +39 0445 671035
www.matrixtools.eu - info@matrixtools.eu

MULTIMATRIX 6/24 R MMX


PATENT PENDING

MULTIMATRIX ROTATING SERIES

6 x MAX



= mm 24,0

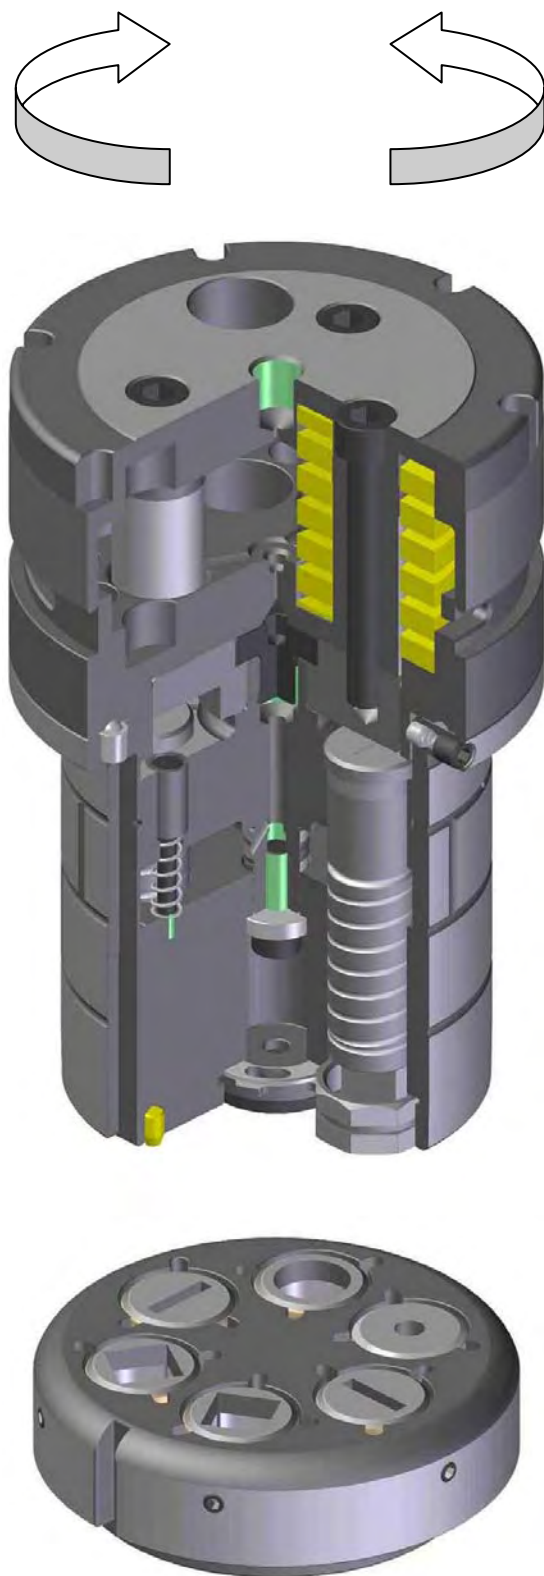

REFERENCE CODES


Basic Set: FALPDY00

Starting Set: FALPGS00


TECHNICAL SPECIFICATIONS

- 6 stations for punches with maximum diagonal mm 24
- Maximum Tonnage: 15 Tons¹
- Quick strippers unblocking
- Quick strippers and punches change, without Multitool opening
- Octagonal strippers for quick punch orientation with 45° steps
- Dies holder with 3 positioning references, for each station
- Compression and extraction aligned with selected punch, for a high rigidity, comparable to a mono tool one
- Total lubrication: inner and outer, manual or automatic
- Customizable upper part according to specific requirements, for several machine models
- Fitting on a regular Thick Turret D Station
- For punching machines with rotating station (index)
- Several models with different tool orientation are available

UPPER ASSEMBLY VIEW

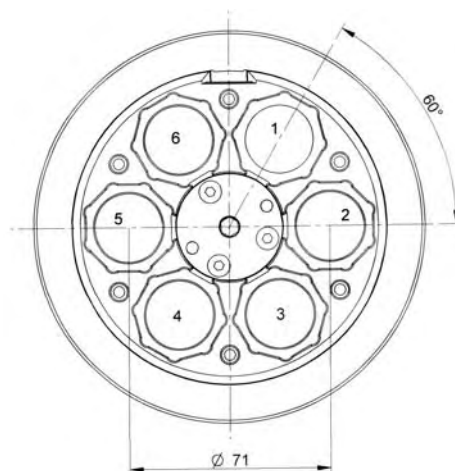

LOWER ASSEMBLY VIEW

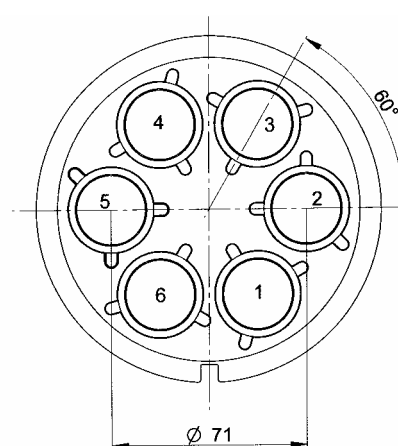

NOTE:


- 1) Some end user can exceed the indicated limit without problems, but it depends on both specific job to be performed and type of punching machine, which aspects must be duly evaluated time by time.

MULTIMATRIX 6/24 F MMX

PATENT PENDING

MULTIMATRIX STANDARD SERIES

6 x MAX \varnothing \square = mm 24,0

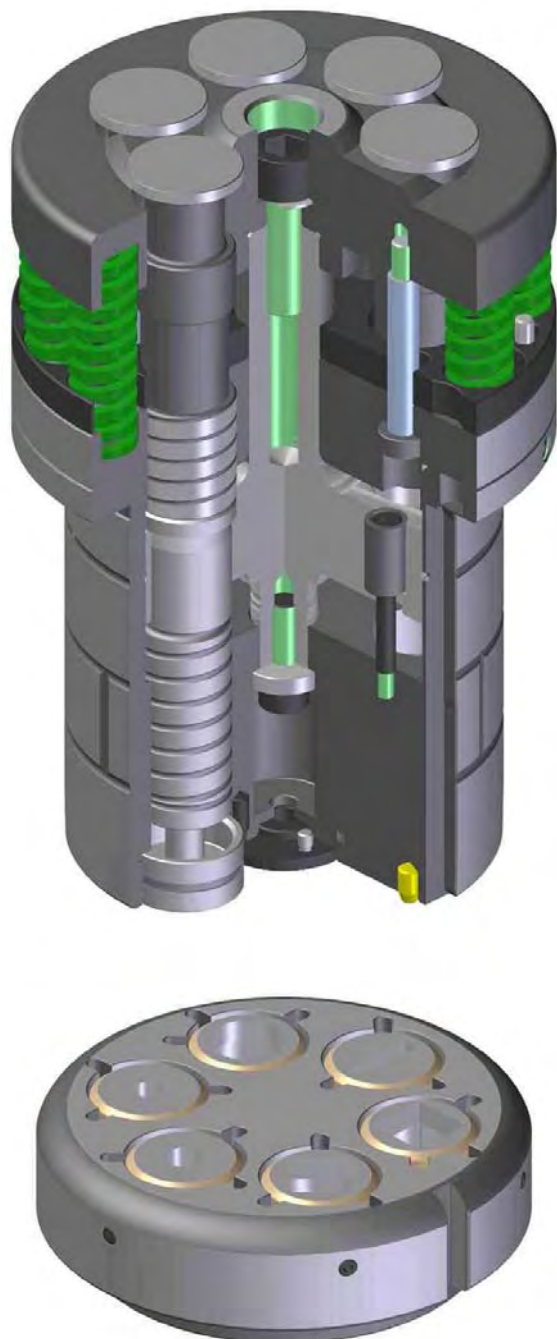

REFERENCE CODES


Basic Set: FALMDY00

Starting Set: FALMGS00


TECHNICAL SPECIFICATIONS

- 6 stations for punches with maximum diagonal mm 24
- Specifically designed to avoid undesired marks on sheet metal
- Maximum Tonnage: 15 Tons¹
- Quick strippers and rams unblocking
- Quick strippers and punches change, without Multitool opening
- Octagonal strippers for quick punch orientation with 45° steps
- Dies holder with 3 positioning references, for each station
- External springs for easy replacement when maintaining
- Total lubrication: inner and outer, manual or automatic
- Fitting on a regular Thick Turret D Station
- For punching machines with fixed station and rotating ram

UPPER ASSEMBLY VIEW

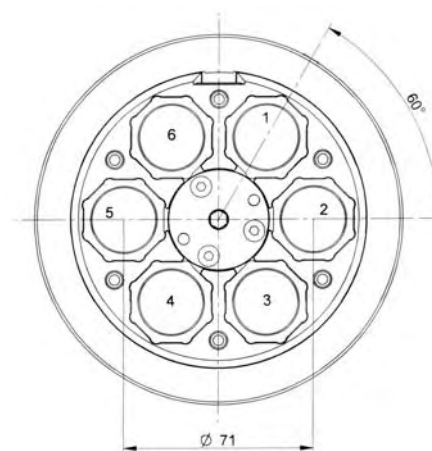

LOWER ASSEMBLY VIEW

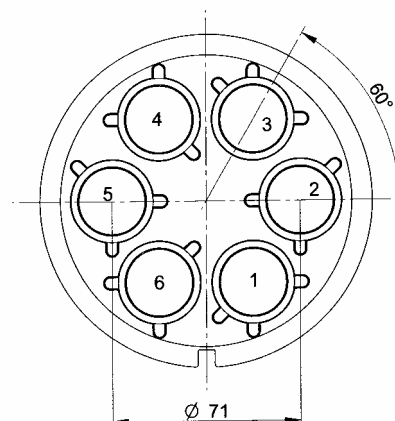


NOTE:

- 1) Some end user can exceed the indicated limit without problems, but it depends on both specific job to be performed and type of punching machine, which aspects must be duly evaluated time by time.

MULTIMATRIX

SERIES 6/24

MAX $\varnothing \nabla = \text{mm } 24,0$

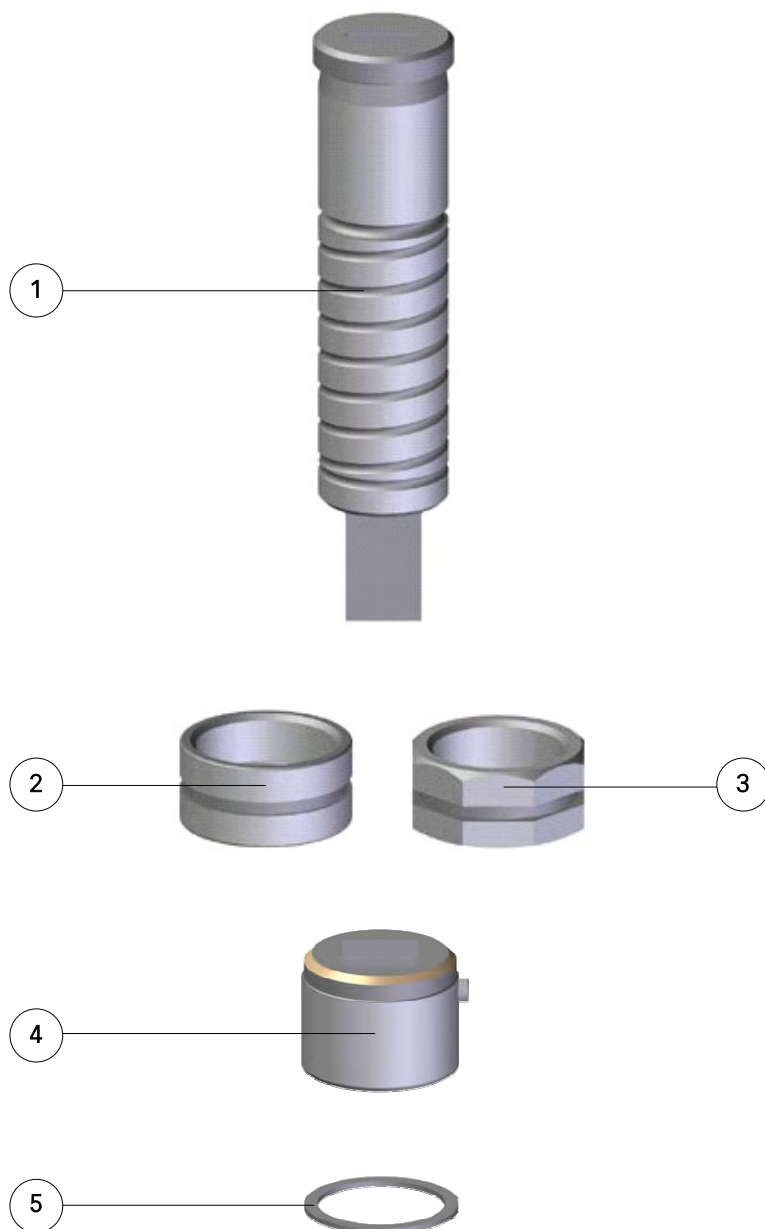

POS.	CODE DESCRIPTION	PRICE
ROUND TOOLS		
1	F250ZZ00.YYY Round Punch	
2	F2494W00.YYY Round Stripper	
4	F2492W00.YYY Round Die	
SHAPED TOOLS		
1	F250ZZXX.YYY Shaped Punch (Standard Shapes ¹)	
3	F2504WXX.YYY Shaped Stripper (Standard Shapes ¹)	
4	F25420XX.YYY Shaped Die (Standard Shapes ¹) - fino a mm 3 di spess.	
4	F25020XX.YYY Shaped Die (Standard Shapes ¹) - oltre mm 3 di spess.	
FITTINGS AND OPTIONS		
5	F2527400 9 x Die Shims Kit	
	WN Whisper Sharpening on Punch	
	DWP Whisper Sharpening on Punch	
	Type A or Type B Coating on Standard Punch (5 extra working days required)	
	Dies with Rotated Shape	
	Punches with Rotated Shapes	
	Dies with small dimensions shapes (under mm 1,70 including clearance)	
	Punches with small dimensions shapes (over or equal to mm 1,5 and under mm 4,00)	
	Punches with small dimensions shapes (under mm 1,5)	
	Anti Slug available on dies with clearance equal to mm 0,13 and over	
	Dies with Anti Slug SC	
TECHNICAL CHARACTERISTICS		
Punch max. diameter/diagonal		mm 24,0
Punch height (new)		mm 113,5
Shear Sharpening on demand		
Die height (new)		mm 24,0
Die min. height (sharpened)		mm 22,5
COMPATIBLE MULTITOOL		
MATRIX:		
MultiMATRIX 6/24		
MultiMATRIX 6/24 N		
MultiMATRIX 6/24 NR		
MultiMATRIX 6/24 R		
MultiMATRIX 6/24 RN		
MultiMATRIX 6/24 RHP		
MultiMATRIX 6/24 RHP-N		
MultiMATRIX 6/24 F MMX		
MultiMATRIX 6/24 FR MMX		
MultiMATRIX 6/24 R MMX		
MultiMATRIX 6/24 RF MMX		
MultiMATRIX 10/24-C R		
NOTE		
¹ Standard Shapes are all those indicated at page 10 beginning with character A		

© 2011




MATRIX s.r.l. Via Ponte d'Oro - 36015 SCHIO (VI) Italy
Tel. +39 0445 671015 - Fax +39 0445 671035
www.matrixtools.eu - info@matrixtools.eu

MULTIMATRIX

SERIES 6/24 AR

MAX \varnothing \square = mm 24,0

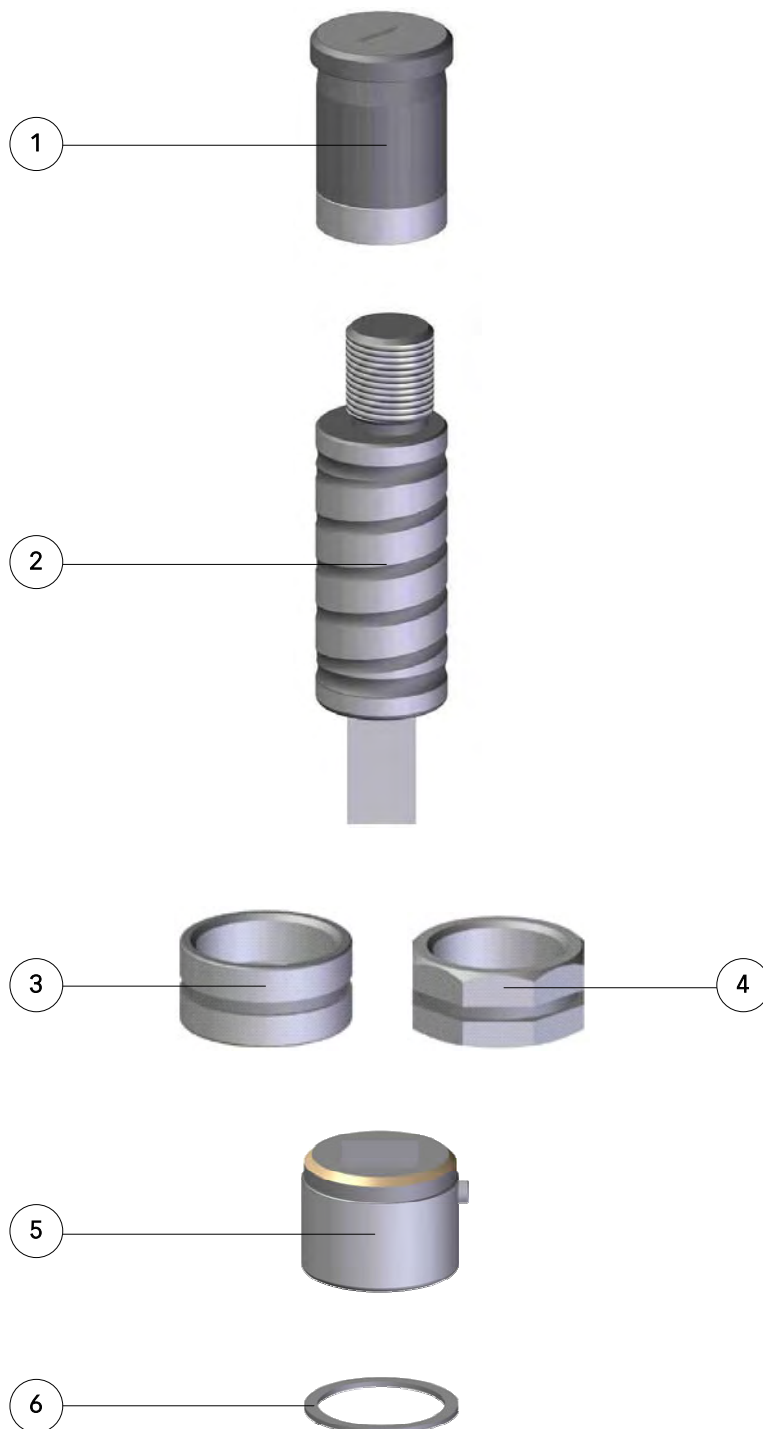

POS.	CODE DESCRIPTION	PRICE
ROUND TOOLS		
1	F802GG00.YYY Adjustment Head	
2	F8020ZZ00.YYY Round Punch	
3	F2494W00.YYY Round Stripper	
5	F2492W00.YYY Round Die	
SHAPED TOOLS		
1	F802GG00.YYY Adjustment Head	
2	F802ZZXX.YYY Shaped Punch (Standard Shapes*)	
4	F2504WXX.YYY Shaped Stripper (Standard Shapes*)	
5	F25420XX.YYY Shaped Die (Standard Shapes*) - up to mm 3	
5	F25020XX.YYY Shaped Die (Standard Shapes*) - over mm 3	
SETTINGS AND OPTIONS		
6	F2527400 9 x Die Shims Kit	
	WN Shear Sharpening on Punch	
	DWP Shear Sharpening on Punch	
	Type A or Type B Coating on Standard Punch (5 extra working days required)	
	Dies with Rotated Shape	
	Punches with Rotated Shapes	
	Dies with small dimensions shapes (under mm 1,70 including clearance)	
	Punches with small dimensions shapes (over or equal to mm 1,5 and under mm 4,00)	
	Punches with small dimensions shapes (under mm 1,5)	
	Anti Slug available on dies with clearance equal to mm 0,13 and over	
	Dies with Anti Slug SC	
TECHNICAL CHARACTERISTICS		
Punch max. diameter/diagonal		mm 24,0
Punch height (new)		mm 113,5
Shear Sharpening on demand		
Die height (new)		mm 24,0
Die min. height (sharpened)		mm 22,5
COMPATIBLE MULTITOOL		
MATRIX:		
MultiMATRIX 6/24		MultiMATRIX 6/24 R MMX
MultiMATRIX 6/24 N		MultiMATRIX 6/24 RF MMX
MultiMATRIX 6/24 NR		MultiMATRIX 10/24-C R
MultiMATRIX 6/24 R		
MultiMATRIX 6/24 RN		
MultiMATRIX 6/24 RHP		
MultiMATRIX 6/24 RHP-N		
MultiMATRIX 6/24 F MMX		
MultiMATRIX 6/24 FR MMX		
NOTE		
* Standard Shapes are all those indicated at page 10 beginning with character A		

© 2011



MATRIX s.r.l. Via Ponte d'Oro - 36015 SCHIO (VI) Italy
Tel. +39 0445 671015 - Fax +39 0445 671035
www.matrixtools.eu - info@matrixtools.eu


MULTIMATRIX 6/24-6 ERHP

PATENTED

MULTIMATRIX ROTATING SERIES

6 x MAX

\varnothing \square = mm 24,0

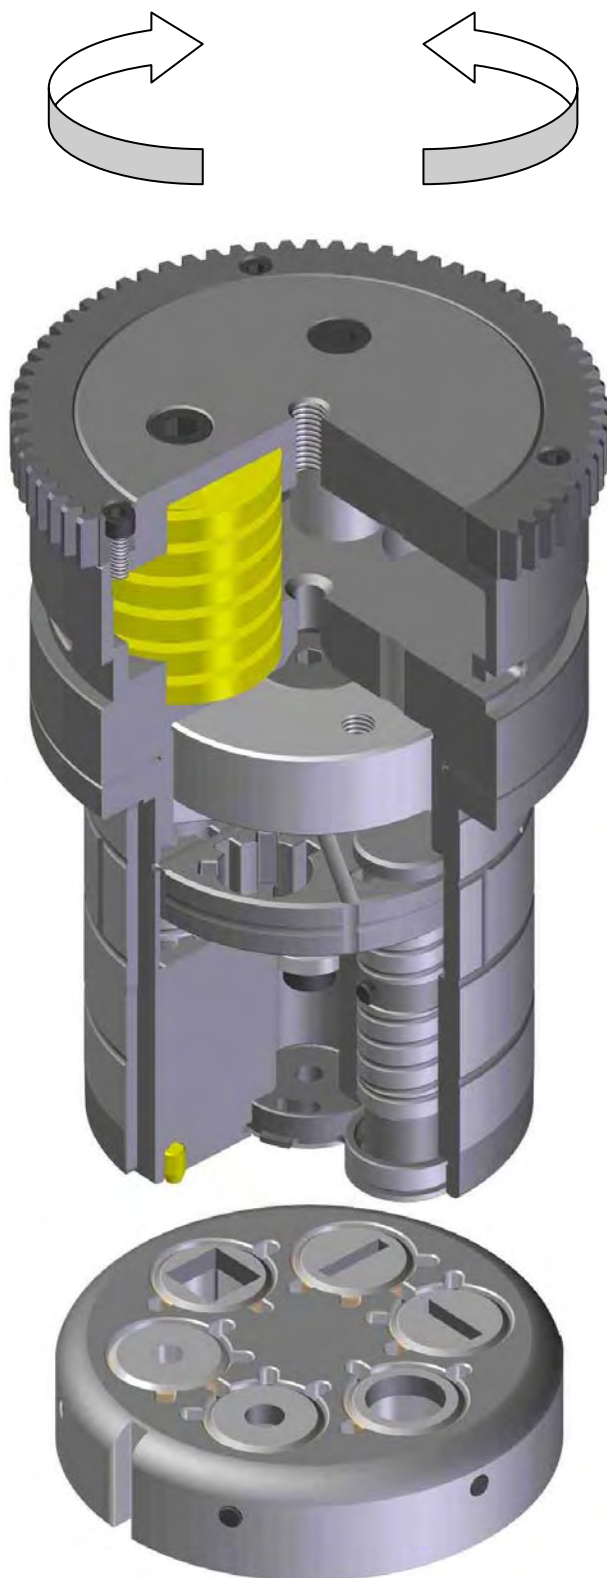

REFERENCE CODES


Basic Set: F845DY00

Starting Set: F845GS00


TECHNICAL SPECIFICATIONS

- 6 stations for punches with maximum diagonal mm 24
- Maximum thickness on standard working:
 - 4 mm on stainless steel
 - 6 mm on mild steel
- Quick strippers unblocking
- Dies holder with 3 positioning references, for each station
- Compression and extraction aligned with selected punch, for high rigidity, comparable to a mono tool one
- Total lubrication: inner and outer, manual or automatic
- Fitting on a regular Thick Turret D Station
- For punching machines with rotating station (index)

UPPER ASSEMBLY VIEW

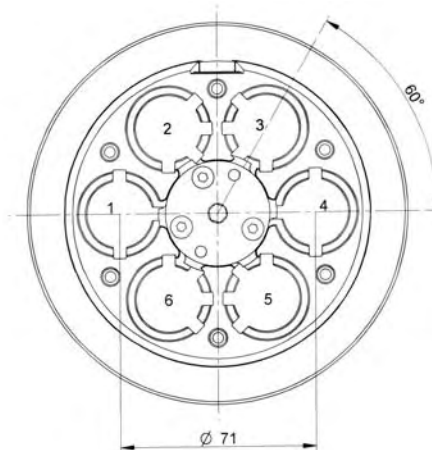


LOWER ASSEMBLY VIEW

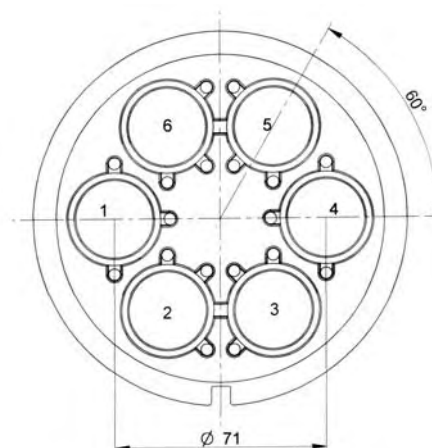

MULTIMT

SERIES 6/24-6 and SERIES 6/24-6 AR

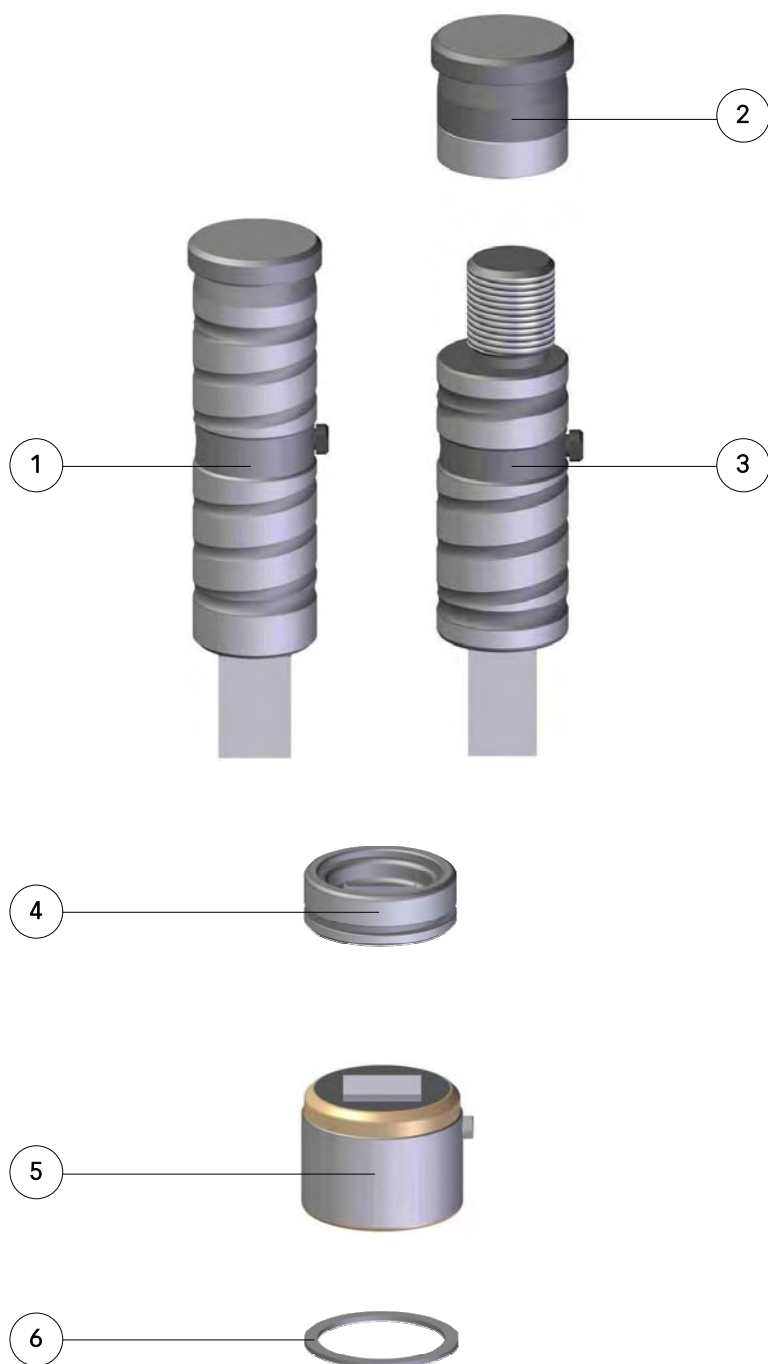MAX \varnothing $\sqrt{}$ = mm 24,0

POS.	CODE DESCRIPTION	PRICE
ROUND TOOLS		
1	F845ZZ00.YYY Round Punch	
2	F803GG00.YYY Adjustment Head	
3	F803ZZ00.YYY Round Punch	
4	F2534W00.YYY Round Stripper	
5	F2492W00.YYY Round Die	
SHAPED TOOLS		
1	F845ZZXX.YYY Shaped Punch (Standard Shapes')	
2	F803GG00.YYY Adjustment Head	
3	F804ZZXX.YYY Shaped Punch (Standard Shapes')	
4	F8454WXX.YYY Shaped Stripper (Standard Shapes')	
5	F25420XX.YYY Shaped Die (Standard Shapes') - up to mm 3	
5	F25020XX.YYY Shaped Die (Standard Shapes') - over mm 3	
SETTINGS AND OPTIONS		
6	F2527400 9 x Die Shims Kit	
	WN Shear Sharpening on Punch	
	DWP Shear Sharpening on Punch	
	Type A or Type B Coating on Standard Punch (5 extra working days required)	
	Dies with Rotated Shape	
	Punches with Rotated Shapes	
	Dies with small dimensions shapes (under mm 1,70 including clearance)	
	Punches with small dimensions shapes (over or equal to mm 1,5 and under mm 4,00)	
	Punches with small dimensions shapes (under mm 1,5)	
	Anti Slug available on dies with clearance equal to mm 0,13 and over	
	Dies with Anti Slug SC	
TECHNICAL CHARACTERISTICS		
Punch max. diameter/diagonal		mm 24,0
Punch height (new)		mm 100,0
Shear Sharpening on demand		
Die height (new)		mm 24,0
Die min. height (sharpened)		mm 22,5
COMPATIBLE MULTITOOL		
MATRIX: MultiMATRIX 6/24-6		
MATE PRECISION TOOLING: XMTE6 (Long) XMTE10		
NOTE Standard Shapes are all those indicated at page 10 beginning with character A		

© 2011



MATRIX s.r.l. Via Ponte d'Oro - 36015 SCHIO (VI) Italy
 Tel. +39 0445 671015 - Fax +39 0445 671035
 www.matrixtools.eu - info@matrixtools.eu


MULTIMATRIX 10/18 R MMX

PATENT PENDING

MULTIMATRIX ROTATING SERIES

10 x MAX

\varnothing \square = mm 18,0

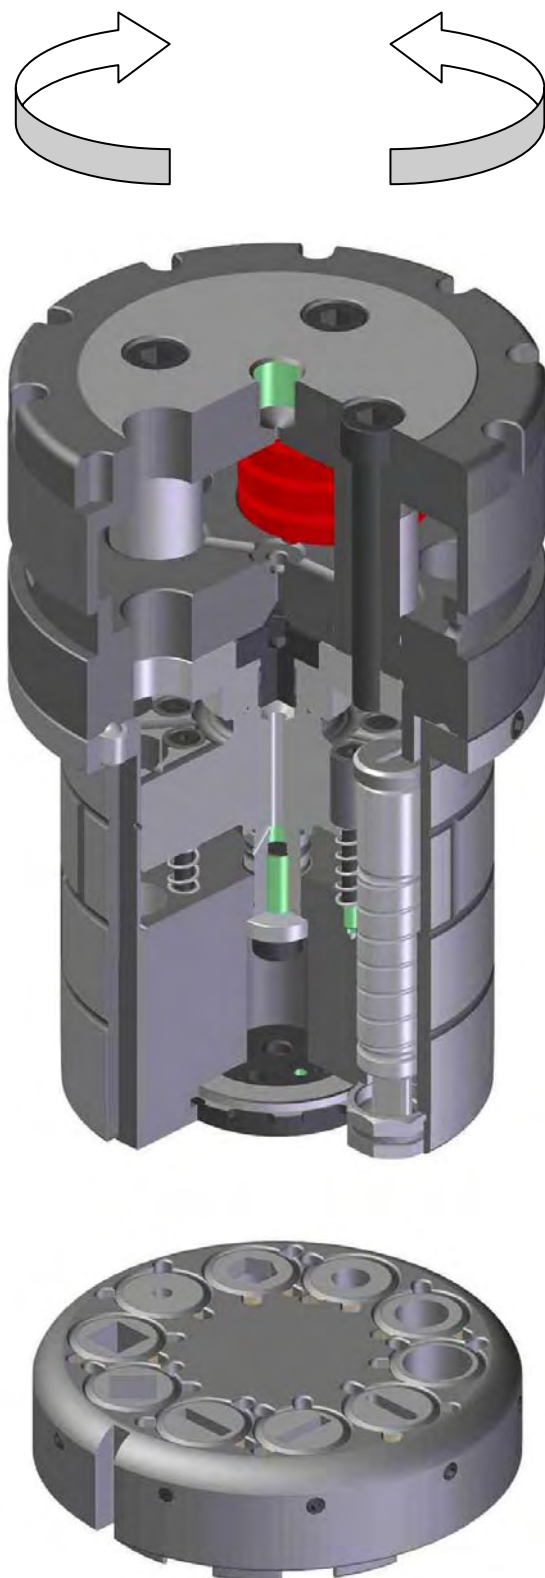

REFERENCE CODES


Basic Set: FALNDY00

Starting Set: FALNGS00


TECHNICAL SPECIFICATIONS

- 10 stations for punches with maximum diagonal mm 18
- Specifically designed to avoid undesired marks on sheet metal
- Maximum Tonnage: 12 Tons¹
- Quick strippers unblocking
- Quick strippers and punches change, without Multitool opening
- Octagonal strippers for quick punch orientation with 45° steps
- Dies holder with 2 positioning references, for each station
- Compression and extraction aligned with selected punch, for a high rigidity, comparable to a mono tool one
- Total lubrication: inner and outer, manual or automatic
- Customizable upper part according to specific requirements, for several machine models
- Fitting on a regular Thick Turret D Station
- For punching machines with rotating station (index)
- Several models with different tool orientation are available

UPPER ASSEMBLY VIEW

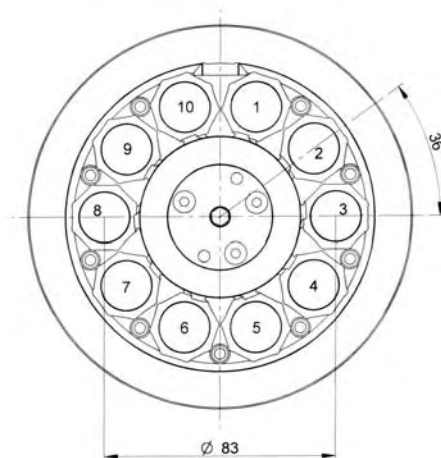

LOWER ASSEMBLY VIEW

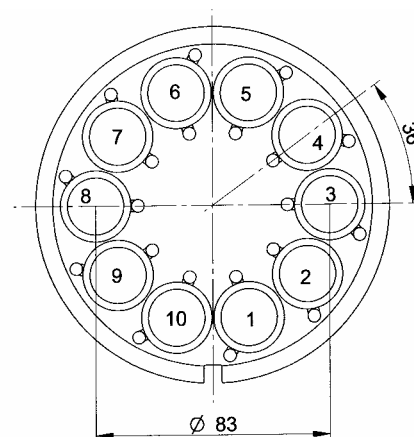

NOTE:


- 1) Some end user can exceed the indicated limit without problems, but it depends on both specific job to be performed and type of punching machine, which aspects must be duly evaluated time by time.

MULTIMATRIX 10/18 F MMX

PATENT PENDING

MULTIMATRIX SERIE STANDARD

10 x MAX \varnothing \square = mm 18,0

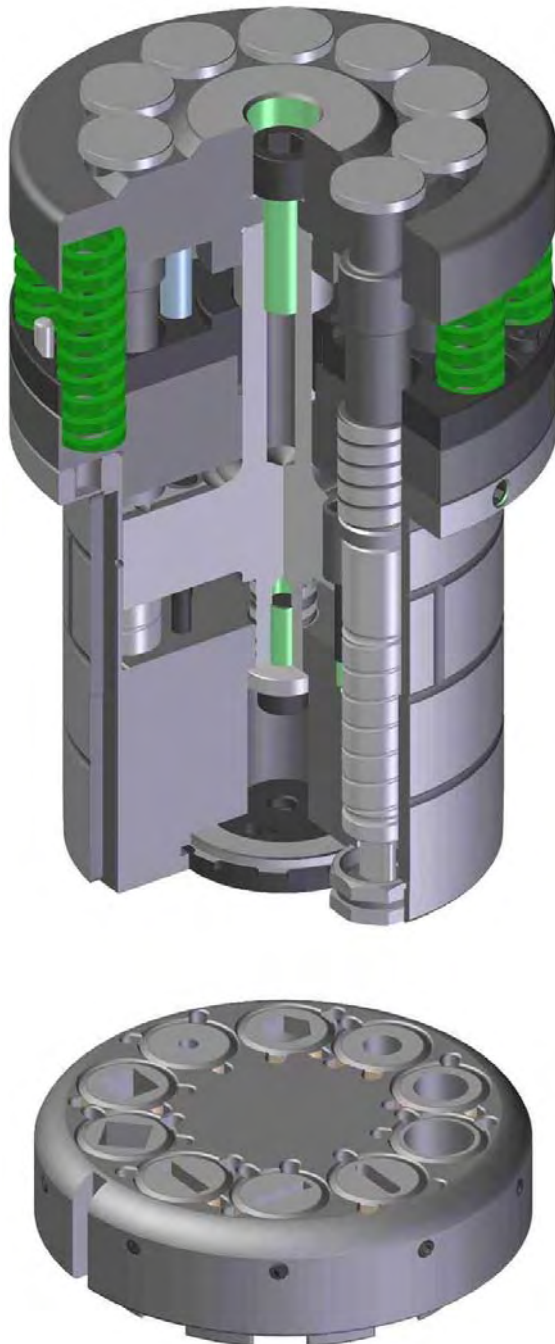

REFERENCE CODES


Basic Set: FALLDY00

Starting Set: FALLGS00


TECHNICAL SPECIFICATIONS

- 10 stations for punches with maximum diagonal mm 18
- Specifically designed to avoid undesired marks on sheet metal
- Maximum Tonnage: 12 Tons¹
- Quick strippers and rams unblocking
- Quick strippers and punches change, without Multitool opening
- Octagonal strippers for quick punch orientation with 45° steps
- Dies holder with 3 positioning references, for each station
- External springs for easy replacement when maintaining
- Total lubrication: inner and outer, manual or automatic
- Fitting on a regular Thick Turret D Station
- For punching machines with fixed station and rotating ram

UPPER ASSEMBLY VIEW

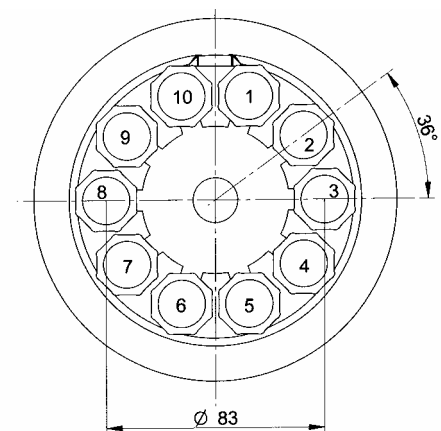

LOWER ASSEMBLY VIEW

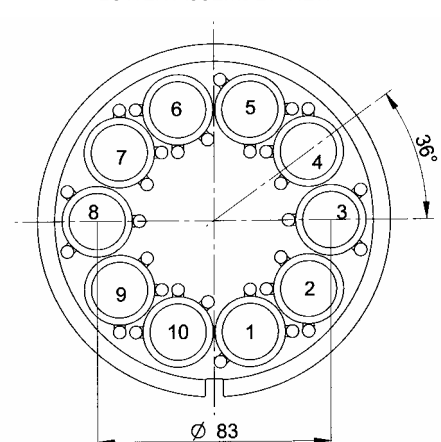

NOTE:


- 1) Some end user can exceed the indicated limit without problems, but it depends on both specific job to be performed and type of punching machine, which aspects must be duly evaluated time by time.



MULTIMATRIX

SERIES 10/18

MAX $\varnothing \nabla$ = mm 18,0

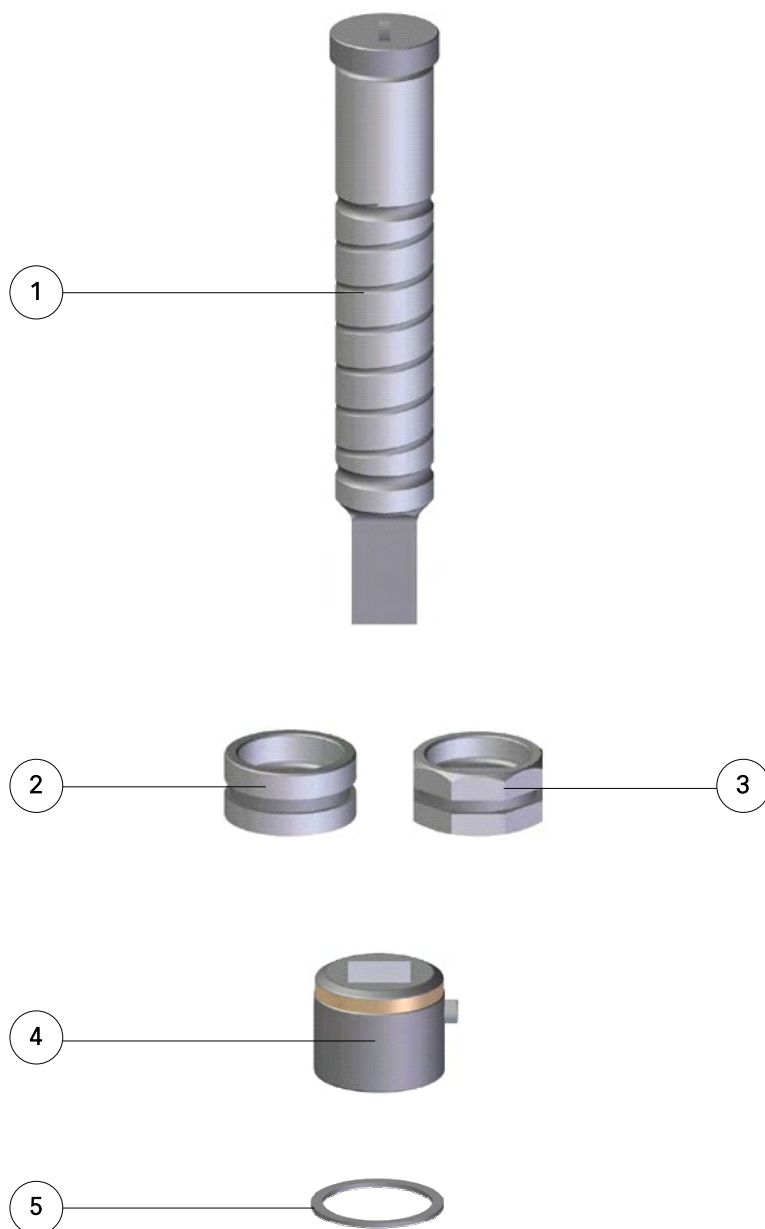

POS.	CODE DESCRIPTION	PRICE
ROUND TOOLS		
1	FA96ZZ00.YYY Round Punch	
2	FA964W00.YYY Round Stripper	
4	FA962W00.YYY Round Die	
SHAPED TOOLS		
1	FA96ZZXX.YYY Shaped Punch (Standard Shapes ¹)	
3	FA974WXX.YYY Shaped Stripper (Standard Shapes ¹)	
4	FA9720XX.YYY Shaped Die (Standard Shapes ¹)	
SETTINGS AND OPTIONS		
5	FA957400 9 x Die Shims Kit	
	WN Shear Sharpening on Punch	
	DWP Shear Sharpening on Punch	
	Type A or Type B Coating on Standard Punch (5 extra working days required)	
	Dies with Rotated Shape	
	Punches with Rotated Shapes	
	Dies with small dimensions shapes (under mm 1,70 including clearance)	
	Punches with small dimensions shapes (over or equal to mm 1,5 and under mm 4,00)	
	Punches with small dimensions shapes (under mm 1,5)	
	Anti Slug available on dies with clearance equal to mm 0,13 and over	
	Dies with Anti Slug SC	
TECHNICAL CHARACTERISTICS		
Punch max. diameter/diagonal		mm 18,0
Punch height (new)		mm 113,5
Shear Sharpening on demand		
Die height (new)		mm 20,0
Die min. height (sharpened)		mm 18,5
COMPATIBLE MULTITOOL		
MATRIX: MultiMATRIX 10/18 N MultiMATRIX 10/18 NR MultiMATRIX 10/18 R MultiMATRIX 10/18 RN MultiMATRIX 10/18 RHP MultiMATRIX 10/18 RHP-N MultiMATRIX 10/18 F MMX MultiMATRIX 10/18 FR MMX MultiMATRIX 10/18 R MMX MultiMATRIX 10/18 RF MMX		
NOTE ¹ Standard Shapes are all those indicated at page 10 beginning with character A		

MULTIMATRIX: MULTITOOL WITH PUNCH HOLDER




MULTIMATRIX 2/A-2/B

MULTIMATRIX STANDARD SERIES

2 x MAX \varnothing \square = mm 12,7

2 x MAX \varnothing \square = mm 31,7

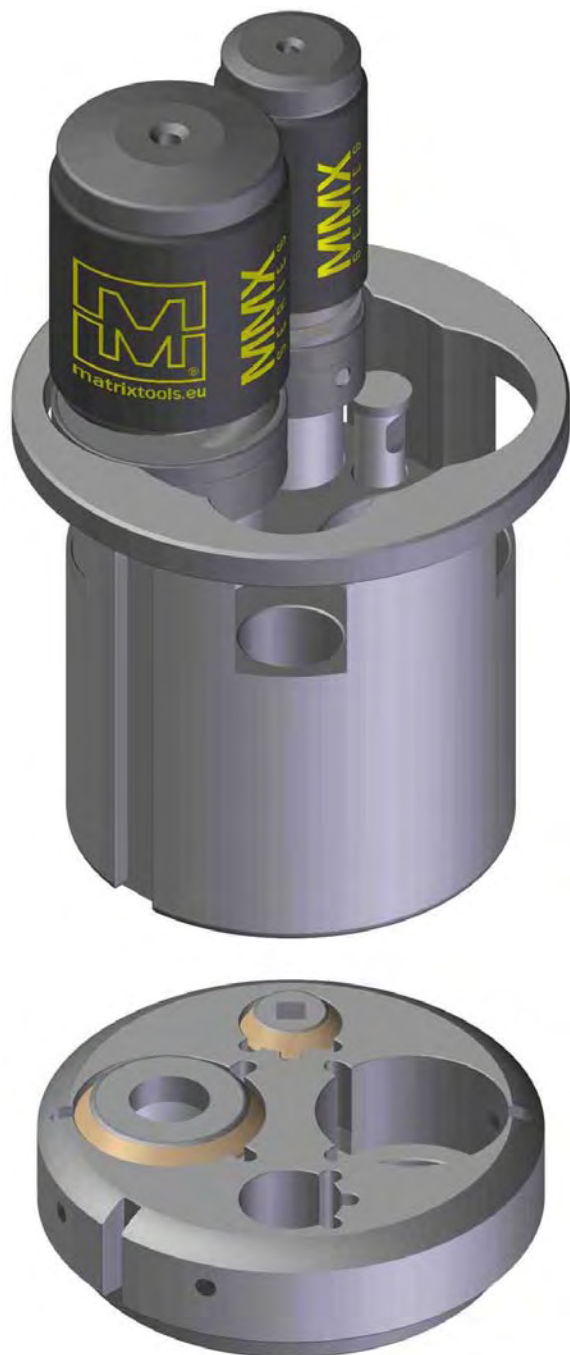

REFERENCE CODES


Basic Set: F613DY00

Starting Set: F613GS00


TECHNICAL SPECIFICATIONS

- Holder for 2 Thick Turret A Stations (maximum tools diagonal mm 12,7) and 2 Thick Turret B Stations (maximum tools diagonal mm 31,7)
- For working thicknesses and technical characteristics, refer to the specifications of used punch holders
- Dies holder with 3 positioning references, for each station
- Fitting on a regular Thick Turret D Station
- For punching machines with fixed station and rotating ram

UPPER ASSEMBLY VIEW

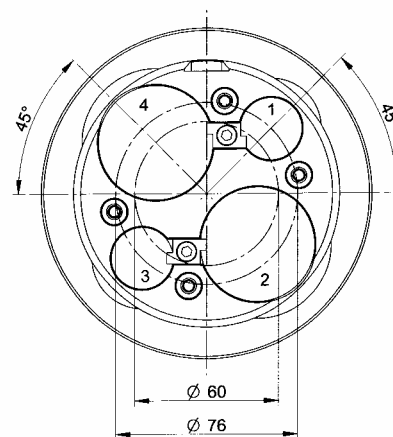


LOWER ASSEMBLY VIEW

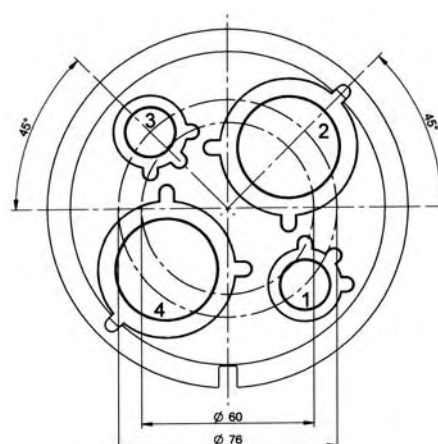

MULTIMATRIX 6/A

MULTIMATRIX STANDARD SERIES

6 x MAX $\varnothing \begin{array}{|c|} \hline \diagup \\ \hline \end{array} = \text{mm } 12,7$

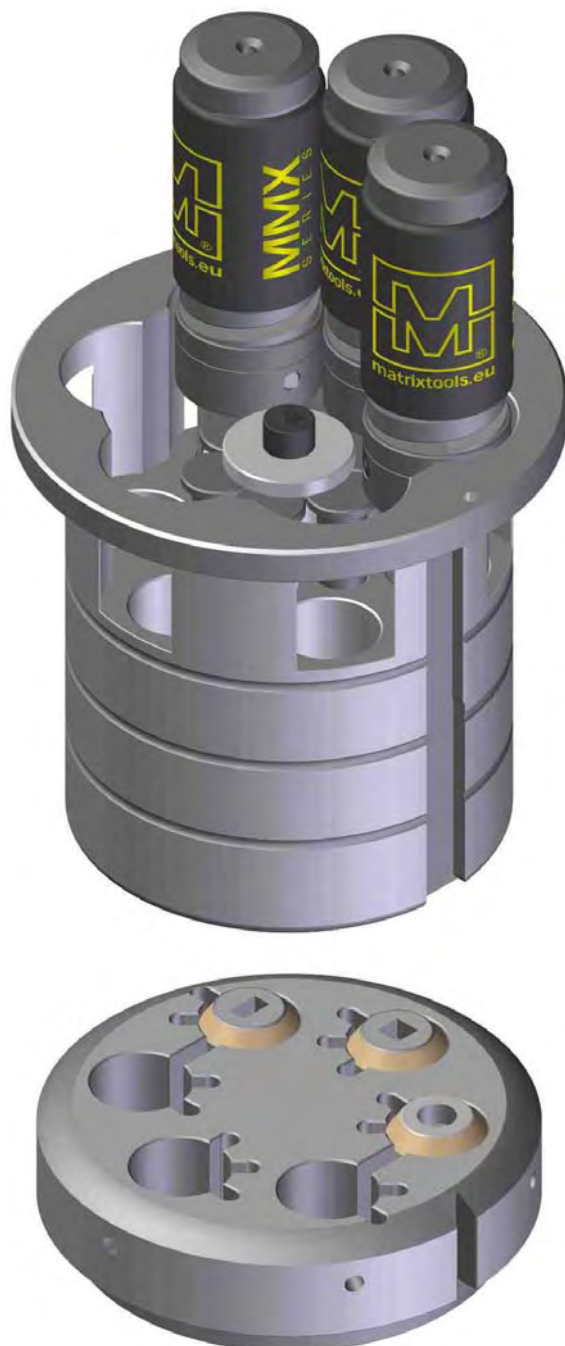

REFERENCE CODES


Basic Set: F612DY00

Starting Set: F612GS00


TECHNICAL SPECIFICATIONS

- Holder for 6 Thick Turret A Stations (maximum tools diagonal mm 12,7)
- For working thicknesses and technical characteristics, refer to the specifications of used punch holders
- Dies holder with 3 positioning references, for each station
- Fitting on a regular Thick Turret D Station
- For punching machines with fixed station and rotating ram

UPPER ASSEMBLY VIEW

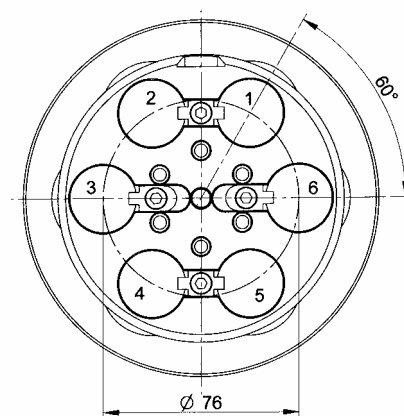

LOWER ASSEMBLY VIEW

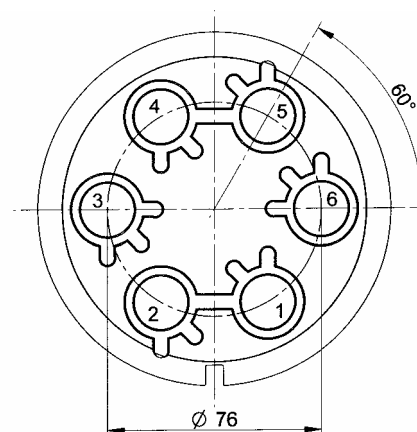

© 2011



MATRIX s.r.l. Via Ponte d'Oro, 8 - 36015 SCHIO (VI) Italy
Tel. +39 0445 671015 - Fax +39 0445 671035
www.matrixtools.eu - info@matrixtools.eu

MULTITOOL: TOOLINGS




© 2011



MULTIMT


SERIES 24

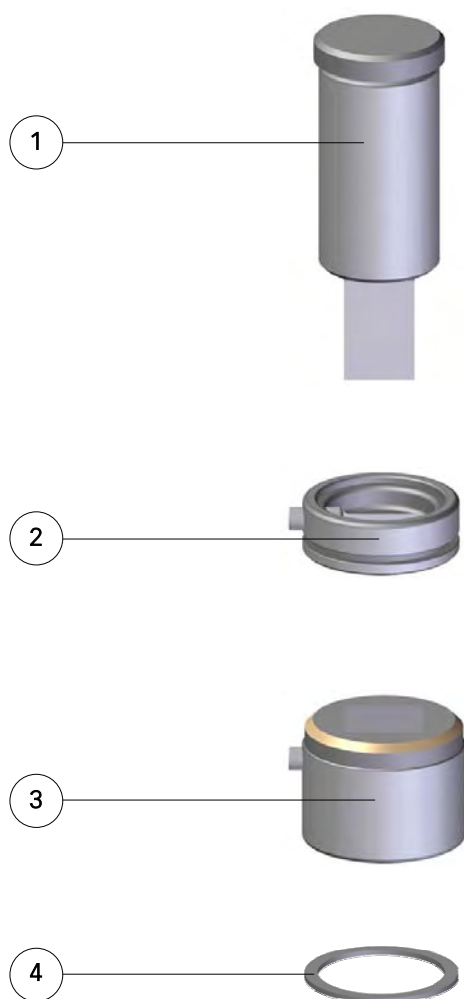MAX $\varnothing \nabla$ = mm 24,0

POS.	CODE DESCRIPTION	PRICE
ROUND TOOLS		
1	F253ZZ00.YYY Round Punch	
2	F2534W00.YYY Round Stripper	
3	F2492W00.YYY Round Die	
SHAPED TOOLS		
1	F253ZZXX.YYY Shaped Punch (Standard Shapes')	
2	F2544WXX.YYY Shaped Stripper (Standard Shapes')	
3	F25420XX.YYY Shaped Die (Standard Shapes')	
SETTINGS AND OPTIONS		
4	F2527400 9 x Die Shims Kit	
	WN Shear Sharpening on Punch	
	DWP Shear Sharpening on Punch	
	Type A or Type B Coating on Standard Punch (5 extra working days required)	
	Dies with Rotated Shape	
	Punches with Rotated Shapes	
	Dies with small dimensions shapes (under mm 1,70 including clearance)	
	Punches with small dimensions shapes (over or equal to mm 1,5 and under mm 4,00)	
	Punches with small dimensions shapes (under mm 1,5)	
	Anti Slug available on dies with clearance equal to mm 0,13 and over	
	Dies with Anti Slug SC	
TECHNICAL CHARACTERISTICS		
Punch max. diameter/diagonal		mm 24,0
Punch height (new)		mm 70,5
Shear Sharpening on demand		
Die height (new)		mm 24,0
Die min. height (sharpened)		mm 22,5
COMPATIBLE MULTITOOL		
MATE PRECISION TOOLING:		
MT6		
MT8		
MTE6		
MTE10		
WILSON TOOL:		
MT 6-24		
MT 8-24		
NOTE Standard Shapes are all those indicated at page 10 beginning with character A		

MULTIMT


SERIES 16

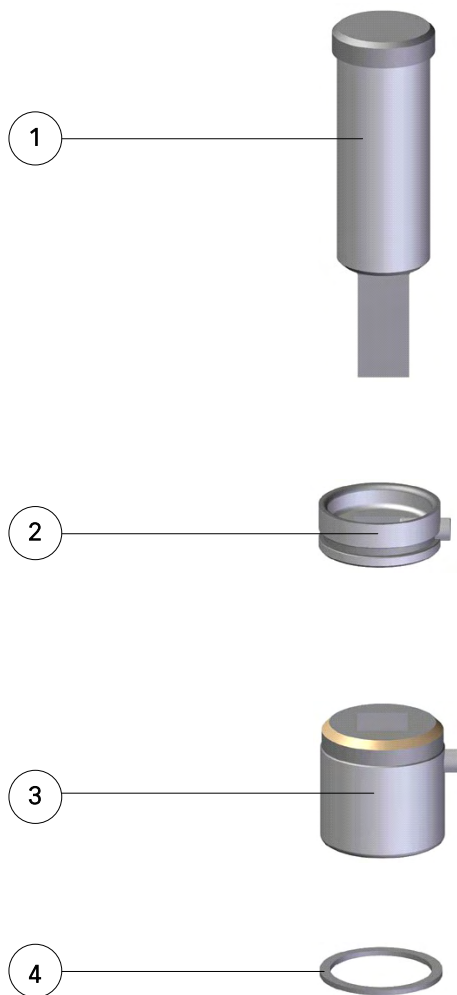MAX \varnothing \square = mm 16,0

POS.	CODE DESCRIPTION	PRICE
ROUND TOOLS		
1	F260ZZ00.YYY Round Punch	
2	F2604W00.YYY Round Stripper	
3	F2602W00.YYY Round Die	
SHAPED TOOLS		
1	F260ZZXX.YYY Shaped Punch (Standard Shapes ¹)	
2	F2614WXX.YYY Shaped Stripper (Standard Shapes ¹)	
3	F26120XX.YYY Shaped Die (Standard Shapes ¹)	
SETTINGS AND OPTIONS		
4	F2607400 9 x Die Shims Kit	
	WN Shear Sharpening on Punch	
	DWP Shear Sharpening on Punch	
	Type A or Type B Coating on Standard Punch (5 extra working days required)	
	Dies with Rotated Shape	
	Punches with Rotated Shapes	
	Dies with small dimensions shapes (under mm 1,70 including clearance)	
	Punches with small dimensions shapes (over or equal to mm 1,5 and under mm 4,00)	
	Punches with small dimensions shapes (under mm 1,5)	
	Anti Slug available on dies with clearance equal to mm 0,13 and over	
	Dies with Anti Slug SC	
TECHNICAL CHARACTERISTICS		
Punch max. diameter/diagonal		mm 16,0
Punch height (new)		mm 70,5
Shear Sharpening on demand		
Die height (new)		mm 24,0
Die min. height (sharpened)		mm 22,5
COMPATIBLE MULTITOOL		
MATE PRECISION TOOLING:		
MT10		
WILSON TOOL:		
MT 6-16		
MT 10-16		
NOTE ¹ Standard Shapes are all those indicated at page 10 beginning with character A		

MULTIMT


SERIES 8

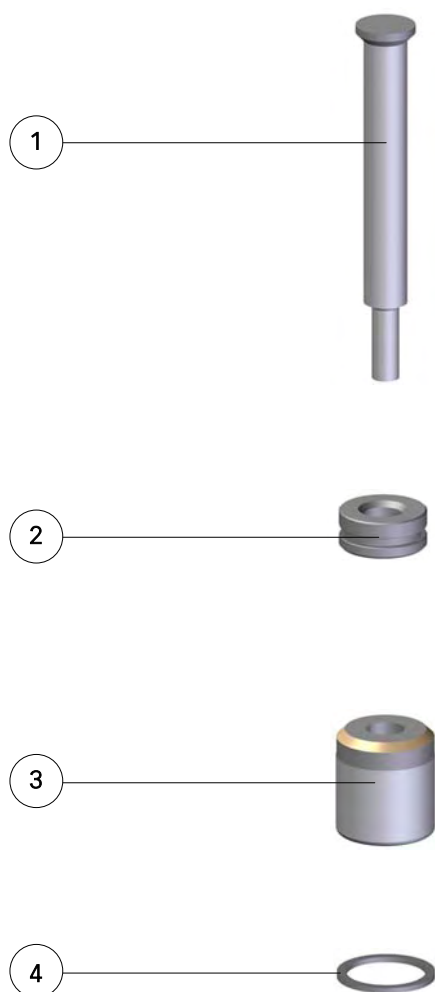MAX $\varnothing \begin{array}{|c|} \hline \diagup \\ \hline \end{array} = \text{mm } 8,0$ 

POS.	CODE DESCRIPTION	PRICE
ROUND TOOLS		
1	F257ZZ00.YYY Round Punch	
2	F2574W00.YYY Round Stripper	
3	F2572W00.YYY Round Die	
SHAPED TOOLS		
1	F257ZZXX.YYY Shaped Punch (Standard Shapes ¹)	
2	F2584WXX.YYY Shaped Stripper (Standard Shapes ¹)	
3	F25820XX.YYY Shaped Die (Standard Shapes ¹)	
SETTINGS AND OPTIONS		
4	F2577400 9 x Die Shims Kit	
	WN Shear Sharpening on Punch	
	Type A or Type B Coating on Standard Punch (5 extra working days required)	
	Dies with Rotated Shape	
	Punches with Rotated Shapes	
	Dies with small dimensions shapes (under mm 1,70 including clearance)	
	Punches with small dimensions shapes (under mm 1,5)	
	Anti Slug available on dies with clearance equal to mm 0,13 and over	
	Dies with Anti Slug SC	
TECHNICAL CHARACTERISTICS		
Punch max. diameter/diagonal		mm 8,0
Punch height (new)		mm 70,5
Shear Sharpening on demand		
Die height (new)		mm 17,0
Die min. height (sharpened)		mm 15,5
COMPATIBLE MULTITOOL		
MATE PRECISION TOOLING:		
MT20		
MT24		
MTE10		
WILSON TOOL:		
MT 12-8 (Round only)		
MT 20-8		
MT 24-8		
NOTE		
¹ Standard Shapes are all those indicated at page 10 beginning with character A		

MULTIMT


SERIES XB

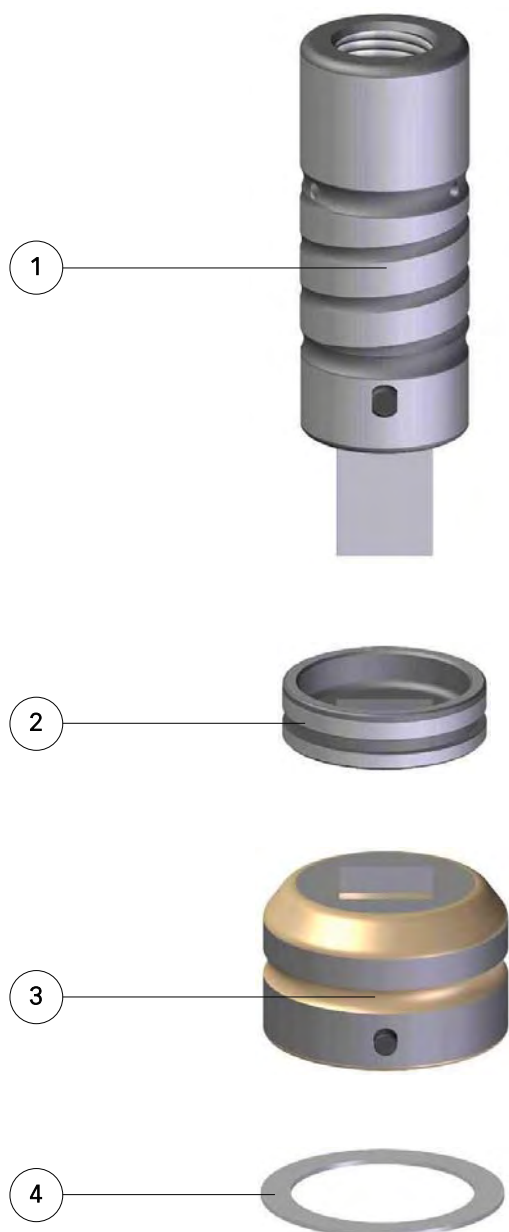MAX $\varnothing \nabla = \text{mm } 31,7$ 

POS.	CODE DESCRIPTION	PRICE
ROUND TOOLS		
1	F219ZZ00.YYY Round Punch	
2	FAG64W00.YYY Round Stripper	
3	F222W00.YYY Round Die	
SHAPED TOOLS		
1	F219ZZXX.YYY Shaped Punch (Standard Shapes ¹)	
2	FAG64WXX.YYY Shaped Stripper (Standard Shapes ¹)	
3	F2232WXX.YYY Shaped Die (Standard Shapes ¹)	
SETTINGS AND OPTIONS		
4	F2187400 9 x Die Shims Kit	
	WN Shear Sharpening on Punch	
	DWP Shear Sharpening on Punch	
	WNT Shear Sharpening on Punch	
	DWNT Shear Sharpening on Punch	
	Type A or Type B Coating on Standard Punch (5 extra working days required)	
	Dies with Rotated Shape	
	Stengthened Shaped Die	
	Shaped Dies with 3 References: 0°-90°-225°	
	Punches with Rotated Shapes	
	Dies with small dimensions shapes (under mm 1,70 including clearance)	
	Punches with small dimensions shapes (over or equal to mm 1,5 and under mm 4,00)	
	Punches with small dimensions shapes (under mm 1,5)	
	Anti Slug available on dies with clearance equal to mm 0,13 and over	
	Dies with Anti Slug SC	
TECHNICAL CHARACTERISTICS		
Punch max. diameter/diagonal		mm 31,7
Punch height (new)		mm 100,5
Shear Sharpening on demand		
Die height (new)		mm 30,4
Die min. height (sharpened)		mm 27,9
COMPATIBLE MULTITOOL		
MATE PRECISION TOOLING:		
XMTE4		
NOTE ¹ Standard Shapes are all those indicated at page 10 beginning with character A		

MULTIMT


SERIES 6/24-6

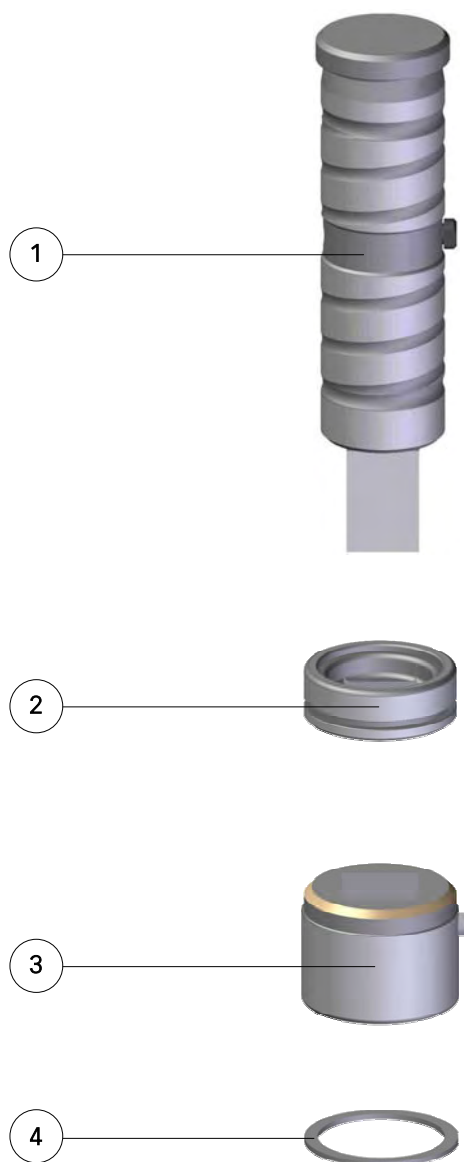MAX $\varnothing \nabla$ = mm 24,0

POS.	CODE DESCRIPTION	PRICE
ROUND TOOLS		
1	F845ZZ00.YYY Round Punch	
2	F2534W00.YYY Round Stripper	
3	F2492W00.YYY Round Die	
SHAPED TOOLS		
1	F845ZZXX.YYY Shaped Punch (Standard Shapes ¹)	
2	F8454WXX.YYY Shaped Stripper (Standard Shapes ¹)	
3	F25420XX.YYY Shaped Die (Standard Shapes ¹) - up to mm 3	
3	F25020XX.YYY Shaped Die (Standard Shapes ¹) - over mm 3	
SETTINGS AND OPTIONS		
4	F2527400 9 x Die Shims Kit	
	WN Shear Sharpening on Punch	
	DWP Shear Sharpening on Punch	
	Type A or Type B Coating on Standard Punch (5 extra working days required)	
	Dies with Rotated Shape	
	Punches with Rotated Shapes	
	Dies with small dimensions shapes (under mm 1,70 including clearance)	
	Punches with small dimensions shapes (over or equal to mm 1,5 and under mm 4,00)	
	Punches with small dimensions shapes (under mm 1,5)	
	Anti Slug available on dies with clearance equal to mm 0,13 and over	
	Dies with Anti Slug SC	
TECHNICAL CHARACTERISTICS		
Punch max. diameter/diagonal		mm 24,0
Punch height (new)		mm 100,0
Shear Sharpening on demand		
Die height (new)		mm 24,0
Die min. height (sharpened)		mm 22,5
COMPATIBLE MULTITOOL		
MATRIX: MultiMATRIX 6/24-6 MATE PRECISION TOOLING: XMTE6 (Long) XMTE10		
NOTE ¹ Standard Shapes are all those indicated at page 10 beginning with character A		

MULTIMT


SERIES 6/24-6 AR

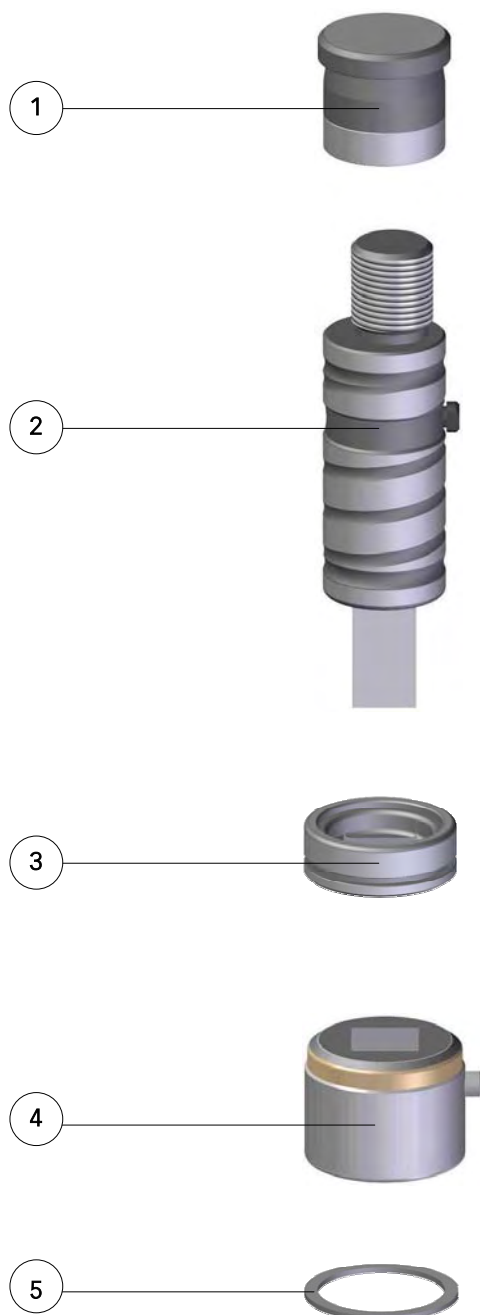MAX \varnothing \square = mm 24,0

POS.	CODE DESCRIPTION	PRICE
ROUND TOOLS		
1	F803GG00.YYY Adjustment Head	
2	F803ZZ00.YYY Round Punch	
3	F2534W00.YYY Round Stripper	
4	F2492W00.YYY Round Die	
SHAPED TOOLS		
1	F803GG00.YYY Adjustment Head	
2	F804ZZXX.YYY Shaped Punch (Standard Shapes')	
3	F8454WXX.YYY Shaped Stripper (Standard Shapes')	
4	F25420XX.YYY Shaped Die (Standard Shapes') - up to mm 3	
4	F25020XX.YYY Shaped Die (Standard Shapes') - over mm 3	
SETTINGS AND OPTIONS		
5	F2527400 9 x Die Shims Kit	
	WN Shear Sharpening on Punch	
	DWP Shear Sharpening on Punch	
	Type A or Type B Coating on Standard Punch (5 extra working days required)	
	Dies with Rotated Shape	
	Punches with Rotated Shapes	
	Dies with small dimensions shapes (under mm 1,70 including clearance)	
	Punches with small dimensions shapes (over or equal to mm 1,5 and under mm 4,00)	
	Punches with small dimensions shapes (under mm 1,5)	
	Anti Slug available on dies with clearance equal to mm 0,13 and over	
	Dies with Anti Slug SC	
TECHNICAL CHARACTERISTICS		
Punch max. diameter/diagonal		mm 24,0
Punch height (new)		mm 100,0
Shear Sharpening on demand		
Die height (new)		mm 24,0
Die min. height (sharpened)		mm 22,5
COMPATIBLE MULTITOOL		
MATRIX: MultiMATRIX 6/24-6 MATE PRECISION TOOLING: XMTE6 (Long) XMTE10		
NOTE Standard Shapes are all those indicated at page 10 beginning with character A		

MULTIMT


SERIES X12,7

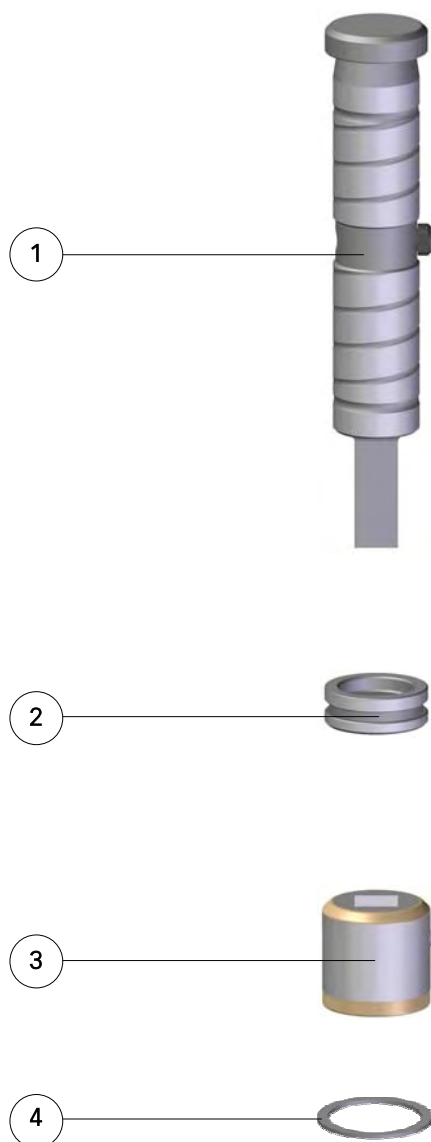MAX $\varnothing \nabla$ = mm 12,7

POS.	CODE DESCRIPTION	PRICE
ROUND TOOLS		
1	FAFRZZ00.YYY Round Punch	
2	FAFQ4W00.YYY Round Stripper	
3	FAFQ2W00.YYY Round Die	
SHAPED TOOLS		
1	FAFRZZXX.YYY Shaped Punch (Standard Shapes ¹)	
2	FAFQ4WXX.YYY Shaped Stripper (Standard Shapes ¹)	
3	FAFR20XX.YYY Shaped Die (Standard Shapes ¹)	
SETTINGS AND OPTIONS		
4	FAFQ7400 9 x Die Shims Kit	
	WN Shear Sharpening on Punch	
	DWP Shear Sharpening on Punch	
	Type A or Type B Coating on Standard Punch (5 extra working days required)	
	Dies with Rotated Shape	
	Punches with Rotated Shapes	
	Dies with small dimensions shapes (under mm 1,70 including clearance)	
	Punches with small dimensions shapes (over or equal to mm 1,5 and under mm 4,00)	
	Punches with small dimensions shapes (under mm 1,5)	
	Anti Slug available on dies with clearance equal to mm 0,13 and over	
	Dies with Anti Slug SC	
TECHNICAL CHARACTERISTICS		
Punch max. diameter/diagonal		mm 12,7
Punch height (new)		mm 100,0
Shear Sharpening on demand		
Die height (new)		mm 20,0
Die min. height (sharpened)		mm 17,5
COMPATIBLE MULTITOOL		
MATE PRECISION TOOLING:		
XMTE10		
NOTE		
¹ Standard Shapes are all those indicated at page 10 beginning with character A		

THICK TURRET

B STATION - LUBRICATED

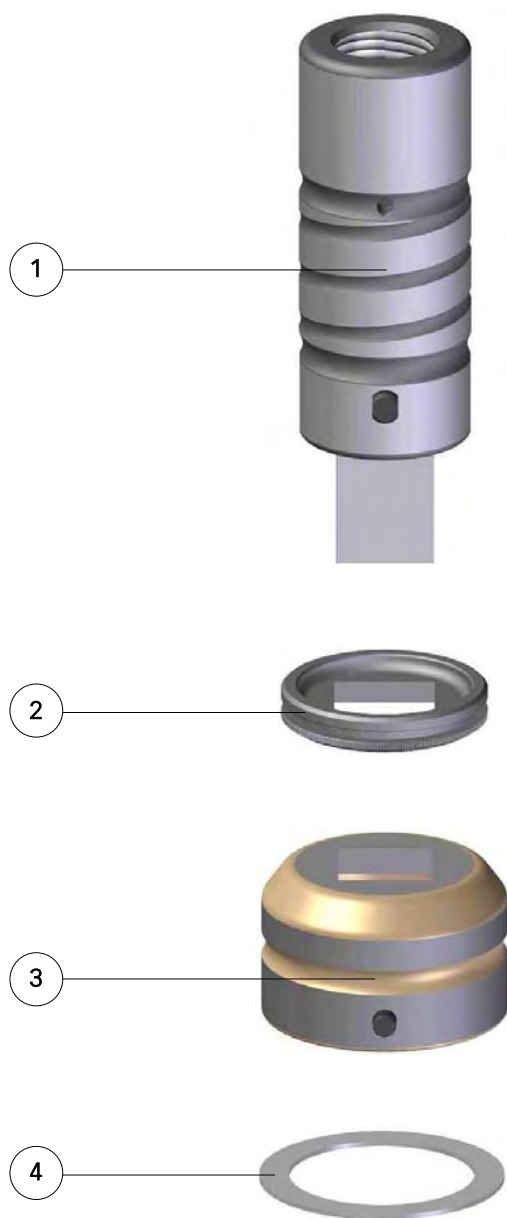MAX $\varnothing \nabla$ = mm 31,7

POS.	CODE DESCRIPTION	PRICE
ROUND TOOLS		
1	F219ZZ00.YYY Round Punch	
2	F2224W00.YYY Round Stripper	
3	F2222W00.YYY Round Die	
SHAPED TOOLS		
1	F219ZZXX.YYY Shaped Punch (Standard Shapes ¹)	
2	F2224WXX.YYY Shaped Stripper (Standard Shapes ¹)	
3	F2232WXX.YYY Shaped Die (Standard Shapes ¹)	
ACCESSORI ED OPZIONI		
4	F2187400 9 x Die Shims Kit	
	WN Shear Sharpening on Punch	
	DWP Shear Sharpening on Punch	
	WNT Shear Sharpening on Punch	
	DWNT Shear Sharpening on Punch	
	Type A or Type B Coating on Standard Punch (5 extra working days required)	
	Dies with Rotated Shape	
	Stengthened Shaped Die	
	Shaped Dies with 3 References: 0°-90°-225°	
	Punches with Rotated Shapes	
	Dies with small dimensions shapes (under mm 1,70 including clearance)	
	Punches with small dimensions shapes (over or equal to mm 1,5 and under mm 4,00)	
	Punches with small dimensions shapes (under mm 1,5)	
	Anti Slug available on dies with clearance equal to mm 0,13 and over	
	Dies with Anti Slug SC	
TECHNICAL CHARACTERISTICS		
Punch max. diameter/diagonal	mm 31,7	
Punch height (new)	mm 100,5	
Shear Sharpening on demand		
Die height (new)	mm 30,4	
Die min. height (sharpened)	mm 27,9	
COMPATIBLE MULTITOOL		
MATRIX: MultiMATRIX 4B RHP		
MATE PRECISION TOOLING: MTE4 Ultra MT 3 Ultra IMT 3		
NOTE ¹ Standard Shapes are all those indicated at page 10 beginning with character A		

© 2011




MATRIX s.r.l. Via Ponte d'Oro - 36015 SCHIO (VI) Italy
Tel. +39 0445 671015 - Fax +39 0445 671035
www.matrixtools.eu - info@matrixtools.eu

THICK TURRET

A STATION - LUBRICATED


MAX $\varnothing \nabla$ = mm 12,7

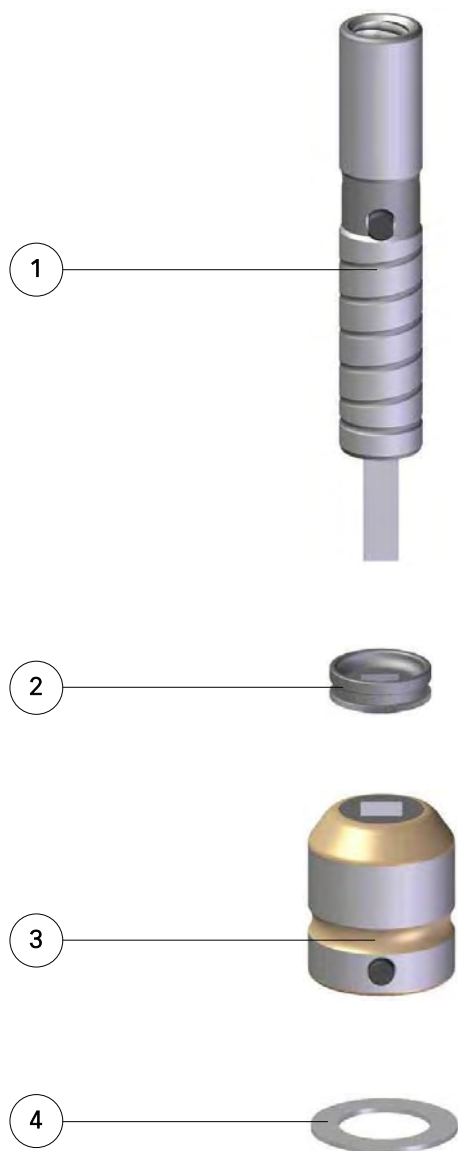

POS.	CODE DESCRIPTION	PRICE
ROUND TOOLS		
1	F215ZZ00.YYY Round Punch	
2	F2144W00.YYY Round Stripper	
3	F2142W00.YYY Round Die	
SHAPED TOOLS		
1	F215ZZXX.YYY Shaped Punch (Standard Shapes ¹)	
2	F2144WXX.YYY Shaped Stripper (Standard Shapes ¹)	
3	F2152WXX.YYY Shaped Die (Standard Shapes ¹)	
SETTINGS AND OPTIONS		
4	F2157400 9 x Die Shims Kit	
	WN Shear Sharpening on Punch	
	DWP Shear Sharpening on Punch	
	Type A or Type B Coating on Standard Punch (5 extra working days required)	
	Dies with Rotated Shape	
	Shaped Dies with 3 References: 0°-90°-225°	
	Punches with Rotated Shapes	
	Dies with small dimensions shapes (under mm 1,70 including clearance)	
	Punches with small dimensions shapes (over or equal to mm 1,5 and under mm 4,00)	
	Punches with small dimensions shapes (under mm 1,5)	
	Anti Slug available on dies with clearance equal to mm 0,13 and over	
	Dies with Anti Slug SC	
TECHNICAL CHARACTERISTICS		
Punch max. diameter/diagonal	mm 12,7	
Punch height (new)	mm 108	
Shear Sharpening on demand		
Die height (new)	mm 30,4	
Die min. height (sharpened)	mm 27,9	
COMPATIBLE MULTITOOL		
MATE PRECISION TOOLING:		
Ultra MT 8		
Ultra IMT 8		
NOTE		
¹ Standard Shapes are all those indicated at page 10 beginning with character A		

MULTIW


SERIES 3B

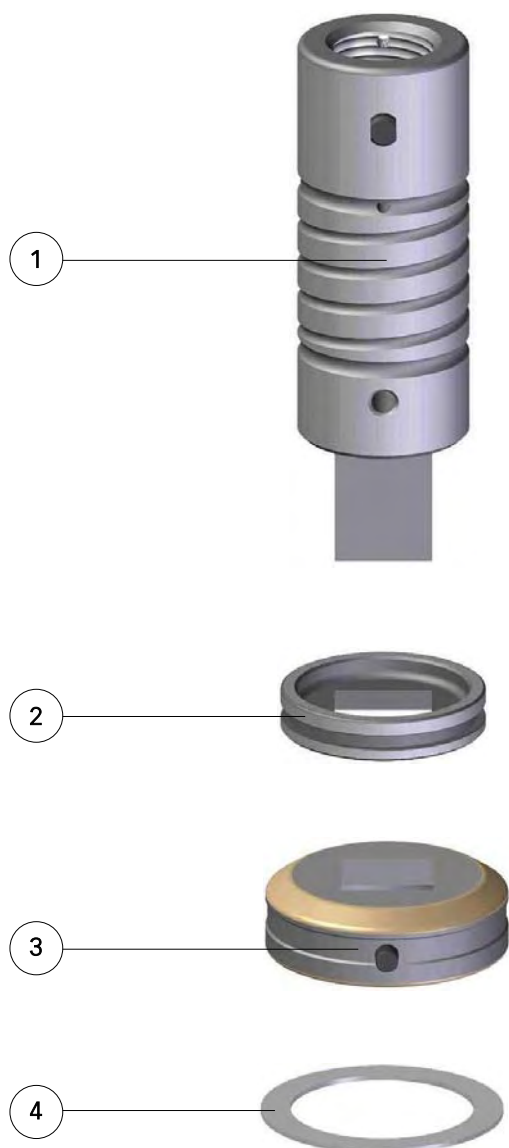MAX $\varnothing \nabla$ = mm 31,7

POS.	CODE DESCRIPTION	PRICE
ROUND TOOLS		
1	F528ZZ00.YYY Round Punch	
2	F7364W00.YYY Round Stripper	
3	F7362W00.YYY Round Die	
SHAPED TOOLS		
1	F528ZZXX.YYY Shaped Punch (Standard Shapes ¹)	
2	F7374WXX.YYY Shaped Stripper (Standard Shapes ¹)	
3	F7382WXX.YYY Shaped Die (Standard Shapes ¹)	
SETTINGS AND OPTIONS		
4	F2187400 9 x Die Shims Kit	
	WN Shear Sharpening on Punch	
	DWP Shear Sharpening on Punch	
	WNT Shear Sharpening on Punch	
	DWNT Shear Sharpening on Punch	
	Type A or Type B Coating on Standard Punch (5 extra working days required)	
	Dies with Rotated Shape	
	Shaped Dies with 3 References: 0°-90°-225°	
	Punches with Rotated Shapes	
	Dies with small dimensions shapes (under mm 1,70 including clearance)	
	Punches with small dimensions shapes (over or equal to mm 1,5 and under mm 4,00)	
	Punches with small dimensions shapes (under mm 1,5)	
	Anti Slug available on dies with clearance equal to mm 0,13 and over	
	Dies with Anti Slug SC	
TECHNICAL CHARACTERISTICS		
Punch max. diameter/diagonal		mm 31,7
Punch height (new)		mm 100,5
Shear Sharpening on demand		
Die height (new)		mm 15,0
COMPATIBLE MULTITOOL		
WILSON TOOL: MT3Ri		
NOTE ¹ Standard Shapes are all those indicated at page 10 beginning with character A		

MULTIW


SERIES 8/16

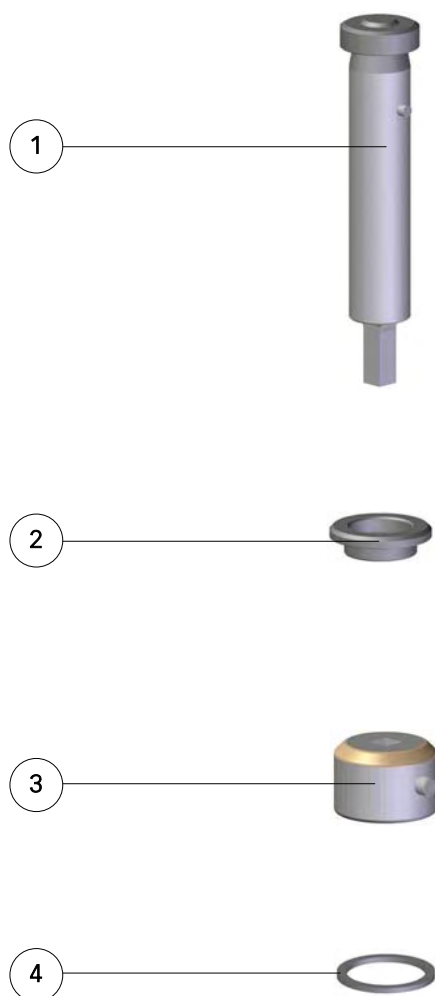MAX $\varnothing \nabla = \text{mm } 16,0$ 

POS.	CODE DESCRIPTION	PRICE
ROUND TOOLS		
1	F AE3ZZ00.YYY Round Punch	
2	F AE34W00.YYY Round Stripper	
3	F AE32W00.YYY Round Die	
SHAPED TOOLS		
1	F AE4ZZXX.YYY Shaped Punch (Standard Shapes ¹)	
2	F AE34WXX.YYY Shaped Stripper (Standard Shapes ¹)	
3	F AE42WXX.YYY Shaped Die (Standard Shapes ¹)	
SETTINGS AND OPTIONS		
4	F2157400 9 x Die Shims Kit	
	WN Shear Sharpening on Punch	
	Type A or Type B Coating on Standard Punch (5 extra working days required)	
	Dies with Rotated Shape	
	Punches with Rotated Shapes	
	Dies with small dimensions shapes (under mm 1,70 including clearance)	
	Punches with small dimensions shapes (under mm 1,5)	
	Anti Slug available on dies with clearance equal to mm 0,13 and over	
	Dies with Anti Slug SC	
TECHNICAL CHARACTERISTICS		
Punch max. diameter/diagonal		mm 16,0
Punch height (new)		mm 100,0
Shear Sharpening on demand		
Die height (new)		mm 17,6
COMPATIBLE MULTITOOL		
WILSON TOOL: 8 Stations Multitool for Nisshinbo Punch Presses (<i>Old design</i>)		
NOTE ¹ Standard Shapes are all those indicated at page 10 beginning with character A		

MULTIW


SERIES 8/16 N

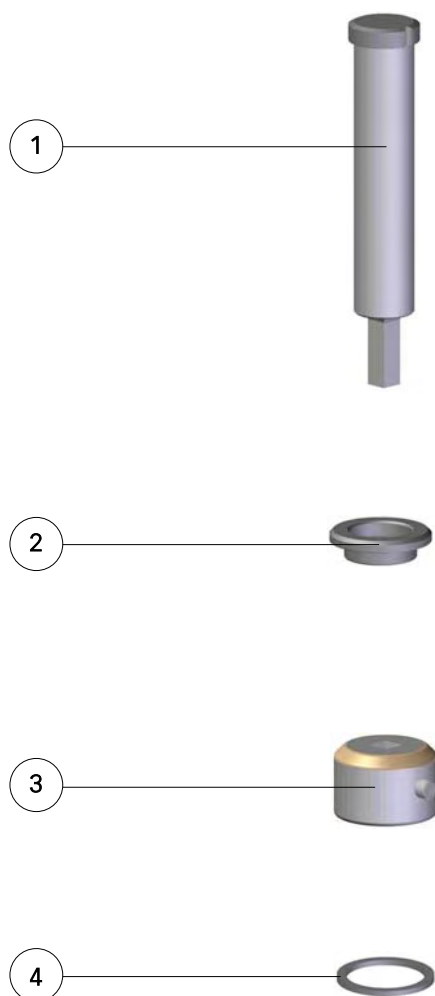MAX $\varnothing \nabla$ = mm 16,0

POS.	CODE DESCRIPTION	PRICE
ROUND TOOLS		
1	FAFMZZ00.YYY Round Punch	
2	FAE34W00.YYY Round Stripper	
3	FAE32W00.YYY Round Die	
SHAPED TOOLS		
1	FAFNZZXX.YYY Shaped Punch (Standard Shapes*) - Reference 0°	
1	FAN6ZZXX.YYY Shaped Punch (Standard Shapes*) - References 0°-45°	
1	FAN7ZZXX.YYY Shaped Punch (Standard Shapes*) - References 0°-90°	
2	FAE34WXX.YYY Shaped Stripper (Standard Shapes*)	
3	FAE42WXX.YYY Shaped Die (Standard Shapes*)	
SETTINGS AND OPTIONS		
4	F2157400 9 x Die Shims Kit	
	WN Shear Sharpening on Punch	
	Type A or Type B Coating on Standard Punch (5 extra working days required)	
	Dies with Rotated Shape	
	Punches with Rotated Shapes	
	Dies with small dimensions shapes (under mm 1,70 including clearance)	
	Punches with small dimensions shapes (under mm 1,5)	
	Anti Slug available on dies with clearance equal to mm 0,13 and over	
	Dies with Anti Slug SC	
TECHNICAL CHARACTERISTICS		
Punch max. diameter/diagonal		mm 16,0
Punch height (new)		mm 100,5
Shear Sharpening on demand		
Die height (new)		mm 17,6
COMPATIBLE MULTITOOL		
WILSON TOOL: MT8i MT8Ri 8 Stations Multitool for Nisshinbo Punch Presses (<i>New design</i>)		
NOTE * Standard Shapes are all those indicated at page 10 beginning with character A		

MULTIW

SERIES 20/8 N

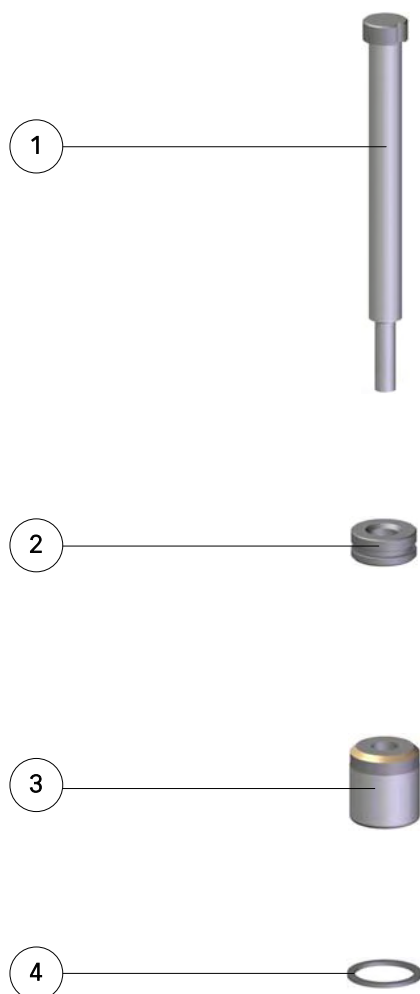MAX \varnothing  = mm 8,0


POS.	CODE DESCRIPTION	PRICE
ROUND TOOLS		
1	F960ZZ00.YYY Round Punch	
2	F2574W00.YYY Round Stripper	
3	F2572W00.YYY Round Die	
SHAPED TOOLS		
1	F960ZZXX.YYY Shaped Punch (Standard Shapes*) - Reference 0°	
1	FAN4ZZXX.YYY Shaped Punch (Standard Shapes*) - References 0°-45°	
1	FAN5ZZXX.YYY Shaped Punch (Standard Shapes*) - References 0°-90°	
2	F9604WXX.YYY Shaped Stripper (Standard Shapes*)	
3	F2582WXX.YYY Shaped Die (Standard Shapes*)	
SETTINGS AND OPTIONS		
4	F2577400 9 x Die Shims Kit	
	WN Shear Sharpening on Punch	
	Type A or Type B Coating on Standard Punch (5 extra working days required)	
	Dies with Rotated Shape	
	Punches with Rotated Shapes	
	Dies with small dimensions shapes (under mm 1,70 including clearance)	
	Punches with small dimensions shapes (under mm 1,5)	
	Anti Slug available on dies with clearance equal to mm 0,13 and over	
	Dies with Anti Slug SC	
TECHNICAL CHARACTERISTICS		
Punch max. diameter/diagonal		mm 8,0
Punch height (new)		mm 100,5
Shear Sharpening on demand		
Die height (new)		mm 17,6
COMPATIBLE MULTITOOL		
WILSON TOOL: MT20i		
NOTE * Standard Shapes are all those indicated at page 10 beginning with character A		

ACCESSORIES AND ADAPTORS




MULTIMATRIX


SHEAR GRINDING FIXTURE

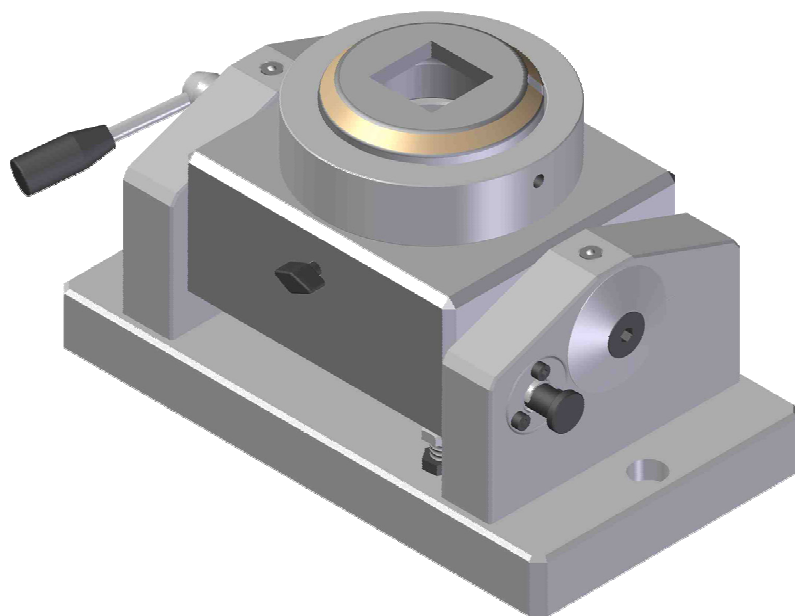


CODE DESCRIPTION	PRICE
FA22QE00 Reclining Universal Base	
TECHNICAL SPECIFICATIONS	
<ul style="list-style-type: none"> The sharpening of tools often is a problem, especially when the tools have a single inclined cutting part or even a double inclined cutting part (see <i>Shear Sharpening</i>). This fixture solves the problem by allowing to execute all kinds of sharpening in an easy and fast way: when it is clamped on grinding machine, it accepts all adaptors showed in this page and in the following one.. To be able to use the following adaptors: FA22QL00 - FA22QP00 - FA22QN00 - FA22QM00 - FA22QF00 - FA22WJ00 It is necessary to combine them with adaptor: FA22QG00 This element is used on 0° position for plain punches and dies, or with a maximum $\pm 20^\circ$ inclination for whisper punches. 	




CODE DESCRIPTION	PRICE
FA22QL00 Punch and Die Adaptor - MultiMT and MultiMATRIX Series 24	



CODE DESCRIPTION	PRICE
FA22QP00 Punch and Die Adaptor - MultiMATRIX Series 18	




CODE DESCRIPTION	PRICE
FA22QN00 Punch and Die Adaptor - MultiMT Series 8	




CODE DESCRIPTION	PRICE
FA22QM00 Punch and Die Adaptor - MultiMT Series 16	

MULTIMATRIX


SHEAR GRINDING FIXTURE

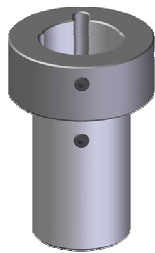

CODE DESCRIPTION	PRICE
FA22QF00 Punch and Die Adaptor - A Station	

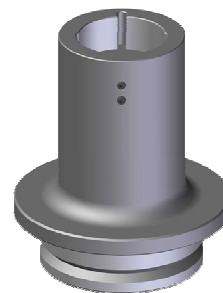

CODE DESCRIPTION	PRICE
FA22QG00 Punch and Die Adaptor - B Station	

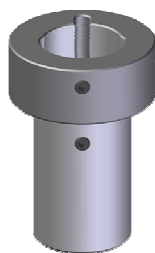


CODE DESCRIPTION	PRICE
FA22WI00 Punch and Die Adaptor - MultiMT Series X12,7	

MULTIMATRIX

ALIGNMENT TOOL

D STATION

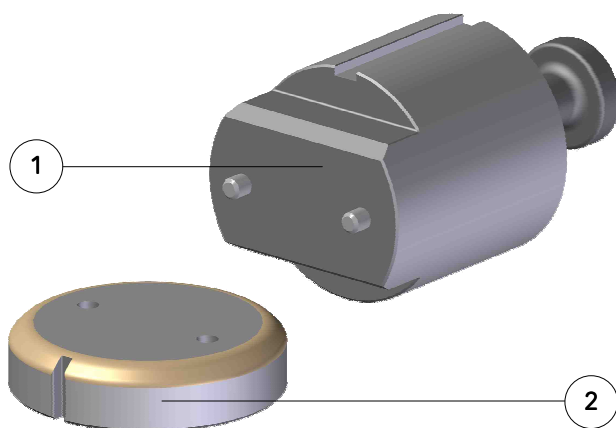

POS.	CODE DESCRIPTION	PRICE
1 + 2	FABU7200 D Station Alignment Tool	
1	FABUEG00 Alignment Punch	
2	FABUEH00 Alignment Die	

© 2011



MATRIX s.r.l. Via Ponte d'Oro - 36015 SCHIO (VI) Italy
Tel. +39 0445 671015 - Fax +39 0445 671035
www.matrixtools.eu - info@matrixtools.eu

TOOL HOLDER CART





POS.	CODE DESCRIPTION	PRICE
1	F680WQ00 Tool Holder Cart	

TECHNICAL SPECIFICATIONS

- Tool holder cart on four wheels, with dimensions mm 745 x 475 x h 1098, composed of:
 - 8 compartments of which: 7 with external height mm 80 and 1 of mm 270;
 - Support plan anti-slip rubber.
 - Tooling for maintenance and tool replacement.

TOOLS

							
NEBULIZER		OILER		GREASE		ABRASIVE STONE	
A3708433.421		A4108544.422		A1808629.425		A2907545.423	
Pneumatic spray with two nozzles, for economic and clean lubrication of sheet metal.		Spray oil can, capacity 0,35 liters.		Grease resistant to high temperatures, ideal for all sliding surfaces such as punches, holders and turrets.		Abrasive stone for shining and reviving corners.	
							
CALIBRE		A4608342.419		ALLEN SPANNER		A3804341.418	
Slider calibre with mm and inch scale.				Set of 9 allen spanners from mm 1,5 to mm 10, for holders maintenance.			
							
HAMMER		A4508140.416		FILE		A2907543.420	
Plastic hammer with anti sliver and anti wearing urethane plugs.				Diamond needle file, for removal or maintenance.			
							
SNIPE		DEMAGNETIZER		LIFTING KEY			
A3908241.417		A4700000.424		F227QC00			
Long nose snipe, length mm 47		220 Volt Frequency 50 Hz, for demagnetizing all punching tools and components.		For extraction of punch holders from punching machine (C/D/E stations and all MultiMATRIX).			

Note: The actual look of these tools might vary according to market availability.

MULTITOOL-TOOLING LINK TABLE

MATRIX - MultiMATRIX 2A-2B		
Tooling:	<i>Thick Turret - A Station (See Thick Turret catalog)</i>	Page:
	<i>Thick Turret - B Station (See Thick Turret catalog)</i>	Page:
MATRIX - MultiMATRIX 4B		
Tooling:	<i>Thick Turret - B Station Standard</i>	Page: 21
MATRIX - MultiMATRIX 4B RHP		
Tooling:	<i>Thick Turret - B Station Lubricated</i>	Page: 19, 43
MATRIX - MultiMATRIX 6A		
Tooling:	<i>Thick Turret - A Station (See Thick Turret catalog)</i>	Page:
MATRIX - MultiMATRIX 6/24		
Tooling:	<i>MultiMATRIX Series 6/24</i>	Page: 24
	<i>MultiMATRIX Series 6/24 AR</i>	Page: 25
MATRIX - MultiMATRIX 6/24 F MMX		
Tooling:	<i>MultiMATRIX Series 6/24</i>	Page: 24
	<i>MultiMATRIX Series 6/24 AR</i>	Page: 25
MATRIX - MultiMATRIX 6/24 FR MMX		
Tooling:	<i>MultiMATRIX Series 6/24</i>	Page: 24
	<i>MultiMATRIX Series 6/24 AR</i>	Page: 25
MATRIX - MultiMATRIX 6/24 N		
Tooling:	<i>MultiMATRIX Series 6/24</i>	Page: 24
	<i>MultiMATRIX Series 6/24 AR</i>	Page: 25
MATRIX - MultiMATRIX 6/24 NR		
Tooling:	<i>MultiMATRIX Series 6/24</i>	Page: 24
	<i>MultiMATRIX Series 6/24 AR</i>	Page: 25
MATRIX - MultiMATRIX 6/24 R		
Tooling:	<i>MultiMATRIX Series 6/24</i>	Page: 24
	<i>MultiMATRIX Series 6/24 AR</i>	Page: 25
MATRIX - MultiMATRIX 6/24 R MMX		
Tooling:	<i>MultiMATRIX Series 6/24</i>	Page: 24
	<i>MultiMATRIX Series 6/24 AR</i>	Page: 25
MATRIX - MultiMATRIX 6/24 RF MMX		
Tooling:	<i>MultiMATRIX Series 6/24</i>	Page: 24
	<i>MultiMATRIX Series 6/24 AR</i>	Page: 25
MATRIX - MultiMATRIX 6/24 RHP		
Tooling:	<i>MultiMATRIX Series 6/24</i>	Page: 24
	<i>MultiMATRIX Series 6/24 AR</i>	Page: 25
MATRIX - MultiMATRIX 6/24 RHP-N		
Tooling:	<i>MultiMATRIX Series 6/24</i>	Page: 24
	<i>MultiMATRIX Series 6/24 AR</i>	Page: 25
MATRIX - MultiMATRIX 6/24 RN		
Tooling:	<i>MultiMATRIX Series 6/24</i>	Page: 24
	<i>MultiMATRIX Series 6/24 AR</i>	Page: 25

MULTITOOL-TOOLING LINK TABLE

MATRIX - MultiMATRIX 6/24-6 ERHP		
Tooling:	<i>MultiMT Series 6/24-6</i>	Page: 27, 40
	<i>MultiMT Series 6/24-6 AR</i>	Page: 27, 41
MATRIX - MultiMATRIX 10/24-C R		
Tooling:	<i>MultiMATRIX Series 6/24</i>	Page: 24
	<i>MultiMATRIX Series 6/24 AR</i>	Page: 25
	<i>Thick Turret - C Station (See Thick Turret catalog)</i>	Page:
MATRIX - MultiMATRIX 10/18 F MMX		
Tooling:	<i>MultiMATRIX Series 10/18</i>	Page: 30
MATRIX - MultiMATRIX 10/18 FR MMX		
Tooling:	<i>MultiMATRIX Series 10/18</i>	Page: 30
MATRIX - MultiMATRIX 10/18 N		
Tooling:	<i>MultiMATRIX Series 10/18</i>	Page: 30
MATRIX - MultiMATRIX 10/18 NR		
Tooling:	<i>MultiMATRIX Series 10/18</i>	Page: 30
MATRIX - MultiMATRIX 10/18 R		
Tooling:	<i>MultiMATRIX Series 10/18</i>	Page: 30
MATRIX - MultiMATRIX 10/18 R MMX		
Tooling:	<i>MultiMATRIX Series 10/18</i>	Page: 30
MATRIX - MultiMATRIX 10/18 RF MMX		
Tooling:	<i>MultiMATRIX Series 10/18</i>	Page: 30
MATRIX - MultiMATRIX 10/18 RHP		
Tooling:	<i>MultiMATRIX Series 10/18</i>	Page: 30
MATRIX - MultiMATRIX 10/18 RHP-N		
Tooling:	<i>MultiMATRIX Series 10/18</i>	Page: 30
MATRIX - MultiMATRIX 10/18 RN		
Tooling:	<i>MultiMATRIX Series 10/18</i>	Page: 30
MATE PRECISION TOOLING - MT6		
Tooling:	<i>MultiMT Series 24</i>	Page: 36
MATE PRECISION TOOLING - MT8		
Tooling:	<i>MultiMT Series 24</i>	Page: 36
MATE PRECISION TOOLING - MT10		
Tooling:	<i>MultiMT Series 16</i>	Page: 37
MATE PRECISION TOOLING - MT20		
Tooling:	<i>MultiMT Series 8</i>	Page: 38
MATE PRECISION TOOLING - MT24		
Tooling:	<i>MultiMT Series 8</i>	Page: 38
MATE PRECISION TOOLING - MTE4		
Tooling:	<i>Thick Turret - B Station Lubricated</i>	Page: 19, 43
MATE PRECISION TOOLING - MTE6		
Tooling:	<i>MultiMT Series 24</i>	Page: 36
MATE PRECISION TOOLING - MTE10		
Tooling:	<i>MultiMT Series 24</i>	Page: 36
	<i>MultiMT Series 8</i>	Page: 38



MULTITOOL-TOOLING LINK TABLE

MATE PRECISION TOOLING - ULTRA IMT3		
Tooling:	<i>Thick Turret - B Station Lubricated</i>	Page: 19, 43
MATE PRECISION TOOLING - ULTRA IMT8		
Tooling:	<i>Thick Turret - A Station Lubricated</i>	Page: 44
MATE PRECISION TOOLING - ULTRA MT3		
Tooling:	<i>Thick Turret - B Station Lubricated</i>	Page: 19, 43
MATE PRECISION TOOLING - ULTRA MT8		
Tooling:	<i>Thick Turret - A Station Lubricated</i>	Page: 44
MATE PRECISION TOOLING - XMTE4		
Tooling:	<i>MultiMT Series XB</i>	Page: 39
MATE PRECISION TOOLING - XMTE6 (Long)		
Tooling:	<i>MultiMT Series 6/24-6</i>	Page: 27, 40
	<i>MultiMT Series 6/24-6 AR</i>	Page: 27, 41
MATE PRECISION TOOLING - XMTE10		
Tooling:	<i>MultiMT Series 6/24-6</i>	Page: 27, 40
	<i>MultiMT Series 6/24-6 AR</i>	Page: 27, 41
	<i>MultiMT Series X12,7</i>	Page: 42
WILSON TOOL - MT3Ri		
Tooling:	<i>MultiW Series 3B</i>	Page: 45
WILSON TOOL - MT6-16		
Tooling:	<i>MultiMT Series 16</i>	Page: 37
WILSON TOOL - MT6-24		
Tooling:	<i>MultiMT Series 24</i>	Page: 36
WILSON TOOL - MT8i		
Tooling:	<i>MultiW Series 8/16 N</i>	Page: 47
WILSON TOOL - MT8Ri		
Tooling:	<i>MultiW Series 8/16 N</i>	Page: 47
WILSON TOOL - MT8-24		
Tooling:	<i>MultiMT Series 24</i>	Page: 36
WILSON TOOL - MT10-16		
Tooling:	<i>MultiMT Series 16</i>	Page: 37
WILSON TOOL - MT12-8		
Tooling:	<i>MultiMT Series 8</i>	Page: 38
WILSON TOOL - MT20i		
Tooling:	<i>MultiW Series 20/8 N</i>	Page: 48
WILSON TOOL - MT20-8		
Tooling:	<i>MultiMT Series 8</i>	Page: 38
WILSON TOOL - MT24-8		
Tooling:	<i>MultiMT Series 8</i>	Page: 38
WILSON TOOL - 8 Stations Multi-Tool for Nisshinbo Punch Presses		
Tooling:	<i>MultiW Series 8/16 (Old Design)</i>	Page: 46
	<i>MultiW Series 8/16 N (New Design)</i>	Page: 47

NOTES



NOTES



TOOLS CODING

In order to give to customers a quick and efficient service each tool feature has been coded, to allow the final user a fast identification means for the correct tool.

Here as following some examples of the most commonly used codes.

Tool Shape (XX)

00 - Round
 01 - Obround
 02 - Square
 03 - Rectangular
 A1 - Special Shape A01
 A2 - Special Shape A02
 A3 - Special Shape A03
 A4 - Special Shape A04
 A5 - Special Shape A05
 A6 - Special Shape A06
 B1 - Special Shape B01
 B2 - Special Shape B02
 B3 - Special Shape B03
 B4 - Special Shape B04
 B5 - Special Shape B05
 B6 - Special Shape B06
 C1 - Special Shape C01
 C2 - Special Shape C02
 C3 - Special Shape C03
 C4 - Special Shape C04
 C5 - Special Shape C05
 C6 - Special Shape C06
 C7 - Special Shape C07
 C8 - Special Shape C08
 C9 - Special Shape C09
 CA - Special Shape C10
 CB - Special Shape C11
 CC - Special Shape C12
 CD - Special Shape C13
 CE - Special Shape C14
 CF - Special Shape C15
 CG - Special Shape C16
 D1 - Special Shape D01
 D2 - Special Shape D02
 D3 - Special Shape D03
 D4 - Special Shape D04
 D5 - Special Shape D05
 D6 - Special Shape D06
 E1 - Special Shape E01
 E2 - Special Shape E02
 E3 - Special Shape E03
 E4 - Special Shape E04
 F1 - Special Shape F01
 F2 - Special Shape F02
 G1 - Special Shape G01
 H1 - Special Shape H01
 H2 - Special Shape H02
 H3 - Special Shape H03
 H4 - Special Shape H04
 H5 - Special Shape H05
 H6 - Special Shape H06
 H7 - Special Shape H07
 H8 - Special Shape H08
 H9 - Special Shape H09
 HA - Special Shape H10
 HB - Special Shape H11
 HC - Special Shape H12
 HD - Special Shape H13

Tool Dimensions (YYY)

This three digit code univocally identifies tool dimensions, if it is a punch, a die or a stripper.

Example:

000 - 3
 001 - 3,5
 002 - 4
 003 - 4,5
 004 - 5
 ...

Tool Groups (W)

In some cases inside a tool typology it is possible to find various groups, meaning measures sets, which are identified through this variable.

Example:

B0 - Punch, 1st Group, "A" Coating
 B1 - Punch, 2nd Group, "A" Coating
 B2 - Punch, 3rd Group, "A" Coating
 B3 - Punch, 4th Group, "A" Coating
 B4 - Punch, 5th Group, "A" Coating

Tool Features (ZZ)

00 - Punch
 20 - Die
 40 - Stripper
 60 - Punch Guide
 63 - Die Adaptor
 68 - Punch Adaptor
 72 - Adjustable Guide Assembly
 AF - Punch Guide
 AR - Die Holder
 B0 - Punch, "A"
 C0 - Punch, "B"
 D0 - Punch, "A" Coating, DWP
 E0 - Punch, "B" Coating, DWP
 F0 - Punch, "A" Coating, DWNT
 G0 - Punch, "B" Coating, DWNT
 H0 - Punch, "A" Coating, WN
 I0 - Punch, "B" Coating, WN
 J0 - Punch, "A" Coating, WNT
 K0 - Punch, "B" Coating, WNT
 L0 - Punch DWP
 M0 - Punch DWNT
 N0 - Punch WN
 P0 - Punch WNT
 Q0 - Punch Extended
 R0 - Punch, Measures under mm 4
 BA - Complete Upper Insert Holder
 BB - Complete Lower Insert Holder
 DY - Basic Set
 GS - Starting Set
 LX - Punch Holder Set

COMPANY PROFILE

We produce tooling for

CNC Punch Presses	Iron Workers
AMADA	FICEP
FINN-POWER	GEKA
LVD	IMS
RAINER	OMERA
TRUMPF	MUBEA
MURATA-WIEDEMANN	PEDDINGHAUS
EUROMAC	KINGSLAND
SCHIAVI	
IMAC	
DURMA	
HACO	

and more.

A DYNAMIC TEAM

Each Matrix product is the result of the cooperation of young and highly qualified technicians who constantly keep themselves abreast and deal with problems and requirements of the production cycle.

THE CUSTOMER, A UNIQUE AND UNREPEATABLE PARTNER

We are convinced that every customer deserves special care. For this reason Matrix does not offer just a product, but also technical support and an advice service which aim is to obtain mutual satisfaction.

QUALITY TOOLS FOR EVERY REQUIREMENT

Our design and production are oriented to develop innovative solutions to fulfil different customers' problems, as well as guarantee the highest quality standard in each production processing phase.

ENERGIES ORIENTED TO MAXIMUM ACCURACY

To the production unit devoted to traditional mechanical processing has been added a new plant optimized to accomplish high technology content processing. The recent building, innovative in our field, is entirely wired and built with specific features to guarantee the product high quality and accuracy.

DIES AND PUNCHES BORN TO LAST

The high reliability and long life which distinguish Matrix' products are the result of experience, devotion, constant research and use of superior quality raw materials.

INNOVATIVE TECHNOLOGIES FOR HIGH PERFORMANCES

Matrix invests in the best technologies: from sophisticated software for designing, to computerization of production data. From the scheduling to product tuning and final test.

The trademarks presented in this catalogue - if they are registered - are property of their respective companies.





Via Ponte d'Oro, 8
36015 Schio
Vicenza Italy
Tel. +39 0445 671015
Fax +39 0445 671035
www.matrixtools.eu
sales@matrixtools.eu

